

Disclaimer

As Infitek has a policy of continuous product development, improvements and changes will be made during the lifetime of this catalogue. Infitek reserves the right to amend the specifications at any time and in any particular way without prior notice provided that the ultimate performance of the equipment is not reduced by such action.

If the dimensions or technical specification of a product in this catalogue are critical, it is important that Infitek is contacted to confirm the details prior to order placement.



Infitek



Infitek



Infitek



Infitek



Infitek



Incubators

Infitek

Infitek Co., Ltd.

TEL: +86-531-88982330
FAX: +86-531-88983691
Website: infitek.com
Email: info@infitek.com
Service: support@infitek.com
Address: Rm. 2014, Bldg. 3, Ligaoguoji Huayuan, No. 1222, West Aoti Road, Lixia District, Jinan, Shandong

US Office

INFITEK INC.

522W RIVERSIDE AVE STE N, SPOKANE, WA 99201
EMAIL: INFO@INFITEK.COM

Infitek

VERSION.2023

INTRODUCTION

Founded in 2010, with the mission of continuously improving the intelligence, precision, safety and convenience of the laboratory, Infitek is a professional manufacturer driven by innovation and service in laboratory and Medical field, our company is certified by ISO9001, ISO13485 and Intellectual Property Management System

In addition to providing our self-produced products, we also provide customers with purchasing and inspection services in whole China market. We provide fully after-sales service to the products running through us.



Each of our facilities have more than 10 years of experienced R&D personnel to ensure the continuous improvement of product quality. In order to ensure processing accuracy, we use internationally renowned sheet metal processing equipment and CNC machine tools, such as DMG MORI and AMADA. The whole production process is strictly implemented in accordance with industry standards. All accessories, metal processing, assembly and inspection work are completed by highly trained and responsible employees.

To guarantee the performance of the finished product, each product line has set up an independent testing room.




18 Factories

We have 18 factories in form of self-establishment, holding or equity participation.



CERTIFICATE

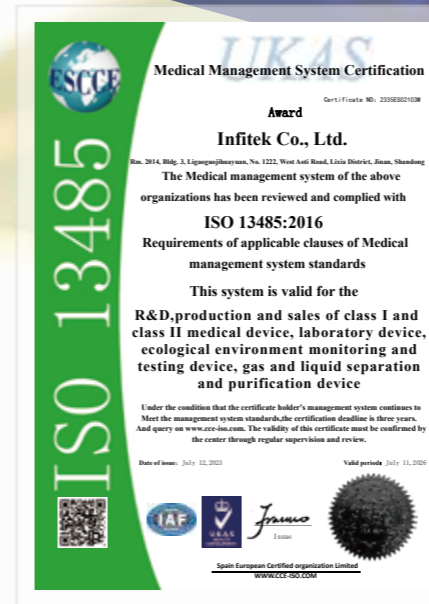

ISO 13485




ISO 9001



FDA



Intellectual Property Management System Certificate

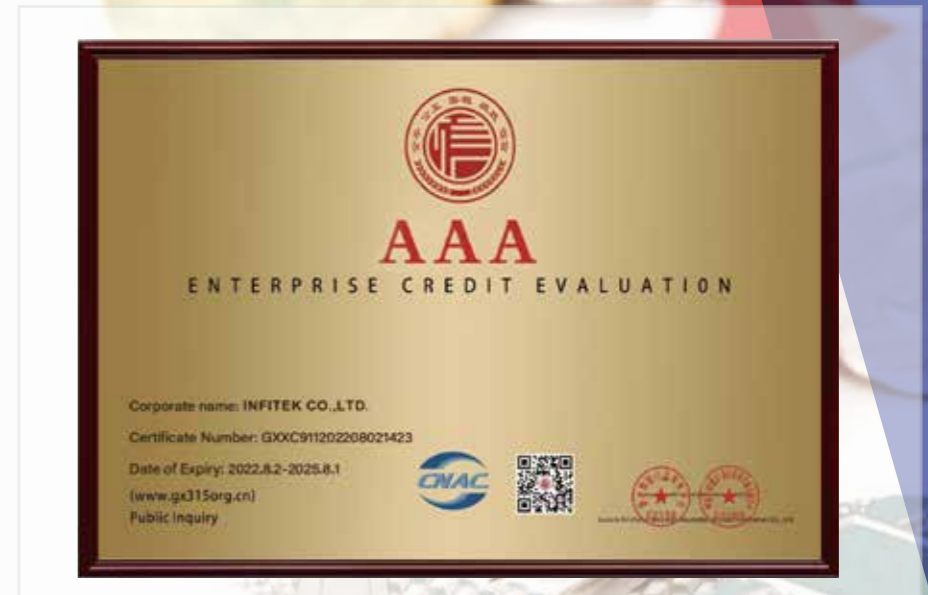

Enterprise Credit Evaluation : AAA

CONTENT

Incubators

Heating Incubator 001

Cooling Incubators 023

Mould Incubator 043

Constant Temp. & Humidity Chamber 045

Plant Growth Chamber 055

CO₂ Incubators 069

Shaking Incubators 075

Egg Incubator 107

CERTIFICATE



Heating Incubator

ICB-30E ICB-50E ICB-80E ICB-160E ICB-270E



Key Features



ICB-30E



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.

Automatically adjust the control parameters according to the ambient temperature and load to achieve the optimal heating method and reduce energy consumption.



ICB-50E ICB-80E ICB-160E ICB-270E



Intelligent control

Large high definition LCD display, with intelligent microcomputer control, parameter real-time display.

Menu-type operation interface, simple and convenient, can quickly set temperature and time parameters.



Internal circulation system

Back suction and both sides forced convection system.

Adopts high-quality fan and large impeller fan, the machine has higher ventilation efficiency and better temperature uniformity.

The shelf is laser hollowed out with round holes for better ventilation and better temperature uniformity.



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down, with a minimum spacing of 30mm.

The inner chamber is made of high-quality brushed stainless steel, with strong corrosion resistance.



Humanized design

Built-in observation window to make the objects in the chamber clear at a glance.

The anti-scalding design of the door handle makes it easy to open and close the door.

Safety



With over temperature control of visible & audible alarm system.



The insulation material is made of high-quality aluminum silicate silk cotton, and the insulation layer of the chamber is thickened.



Equipped with leakage protection device to ensure the safety of operators and other equipment in the laboratory.



Self-diagnosis function: display fault information, which is convenient for judging the fault point.



Application

It is a requisite device for strain storage, biological culture and scientific research in colleges and universities, biological, agricultural or scientific research sectors and other departments.



Optional

Intelligent LCD programmable temperature controller (Optional USB data storage, RS485 / 232 and printer), spare shelf.

Specifications

Model	ICB-30E	ICB-50E	ICB-80E	ICB-160E	ICB-270E	
Capacity (L)	30	50	80	160	270	
Circulation	Forced air convection		Forced air convection			
Dimension (W*D*H)	Internal (mm)	320*300*315	350*350*410	400*400*500	500*500*650	600*600*750
	External (mm)	650*470*510	510*520*800	580*570*890	680*670*1050	770*780*1150
Temperature	Range (°C)	RT+5 ~ 65		RT+5 ~ 65		
	Fluctuation (°C)	0.5		0.5		
	Resolution (°C)	0.1		0.1		
	Uniformity (°C)	±1		±1		
Sensor	PT100		PT100			
Controller	PID		PID			
Display	Large high definition LCD		Large high definition LCD			
Timer (min)	1 ~ 9999		1 ~ 9999			
Material	Internal	Stainless steel		Stainless steel		
	External	Electro-galvanized steel with antimicrobial powder coating		Electro-galvanized steel with antimicrobial powder coating		
Shelves	2	2	2	3	3	
Test Hole (mm)	Optional Ø25, 50, 80		Optional Ø25, 50, 80			
Safety Device	Leakage protector / Over-temperature alarm		Leakage protector / Over-temperature alarm			
Electricity	Voltage / Frequency	AC 220 / 110V, 50 / 60Hz		AC 220 / 110V, 50 / 60Hz		
	Consumption (W)	200	210	280	380	570
N.W. / G.W. (kg)	35 / 40	43 / 50	52 / 55	85 / 95	103 / 110	
Shipping Dimension (W*D*H) (mm)	700*540*700	640*640*940	640*630*1030	720*720*1080	960*850*1260	
Optional	Independent temperature limiting controller		Independent temperature limiting controller			
	Intelligent LCD programmable temperature controller (Optional USB data storage, RS485 / 232 port and printer).		Intelligent LCD programmable temperature controller (Optional USB data storage, RS485 / 232 port and printer), spare shelf.			

Heating Incubator

ICB-30B ICB-45B ICB-65B ICB-125B
 ICB-30BE ICB-45BE ICB-65BE ICB-125BE



Key Features



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.

Automatically adjust the control parameters according to the ambient temperature and load to achieve the optimal heating method and reduce energy consumption.



ICB-30B ICB-45B ICB-65B ICB-125B



Internal circulation system

Breezy forced convection system.

Adopts high-quality fan motor, has higher ventilation efficiency and better temperature uniformity.



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down.

The inner chamber is made of high-quality mirror stainless steel, with strong corrosion resistance.



Intelligent control (B types)

Digital display, with intelligent microcomputer control, parameter real-time display.



Intelligent control (BE types)

Large high definition LCD display, with intelligent microcomputer control, parameter real-time display.

The independent temperature limit system has the function of over-temperature interruption.



Humanized design

Built-in observation window to make the objects in the chamber clear at a glance.

The anti-scalding design of the door handle makes it easy to open and close the door.



The insulation material is made of thickened high-quality ceramic fiber cotton, and the insulation layer of the chamber is thickened.



With over temperature control of visible & audible alarm system.

Application

It is a requisite device for strain storage, biological culture and scientific research in colleges and universities, biological, agricultural or scientific research sectors and other departments.

Optional

RS485 port、 Spare shelf、
Programable temperature
controller



ICB-30B ICB-45B
ICB-65B ICB-125B



ICB-30BE ICB-45BE
ICB-65BE ICB-125BE

Specifications

Model	ICB-30B	ICB-30BE	ICB-45B	ICB-45BE	ICB-65B	ICB-65BE	ICB-125B	ICB-125BE	
Capacity (L)	30	30	45	45	65	65	125	125	
Circulation Mode	Forced convection			Forced convection					
Dimension (W*D*H)	Internal (mm)	310*310*310	310*310*310	350*350*350	350*350*350	400*360*450	400*360*450	500*450*550	500*450*550
	External (mm)	460*510*695	460*510*695	500*550*735	500*550*735	550*550*840	550*550*840	636*680*915	636*680*915
Temperature	Range (°C)	RT+5 ~ 80			RT+5 ~ 80				
	Fluctuation (°C)	±1.0			±1.0				
	Resolution (°C)	0.1			0.1				
	Uniformity (°C)	±1.0			±1.0				
Sensor	PT100			PT100					
Controller	Microcomputer			Microcomputer					
Difference	Model B: LED, Temperature limiter(Optional)		Model BE: LCD, Temperature limiter(Standard)	Model B: LED, Temperature limiter(Optional)		Model BE: LCD, Temperature limiter(Standard)			
Timer (min)	1 ~ 9999			1 ~ 9999					
Material	Internal	Mirror stainless steel			Mirror stainless steel				
	External	Galvanized & sprayed steel		2 / 6	Galvanized & sprayed steel				
Shelves (Standard / Max)	2 / 5	2 / 5		2 / 6	2 / 8	2 / 8	2 / 11	2 / 11	
Exhaust Hole (mm)	Standard Ø28 top with function of test hole			Standard Ø28 top with function of test hole					
Safety Device	Over temperaure visible & audible alarm			Over temperaure visible & audible alarm					
Electricity	Voltage/Frequency	AC 220 / 110V, 50 / 60Hz		250	AC 220 / 110V, 50 / 60Hz				
	Consumption (W)	150	150	41 / 54	250	500	500	600	600
N.W. / G.W.(kg)	38 / 51	38 / 52	620*585*800	41 / 55	42 / 59	42 / 60	57 / 71	57 / 71	
Shipping Dimension(W*D*H) (mm)	550*570*765	550*570*766		620*585*801	640*640*905	640*640*906	730*720*1000	730*720*1001	
Optional	RS485 port、 Spare shelf、 Programable temperature controller			RS485 port、 Spare shelf、 Programable temperature controller					

Heating Incubator

ICB-20 ICB-30 ICB-40 ICB-50 ICB-80
 ICB-81 ICB-140 ICB-160 ICB-250 ICB-270



Key Features



ICB-40 ICB-81 ICB-140 ICB-250



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.

Automatically adjust the control parameters according to the ambient temperature and load to achieve the optimal heating method and reduce energy consumption.



ICB-20 ICB-30 ICB-50 ICB-80
 ICB-160 ICB-270



Intelligent control

Large high definition LCD display, with intelligent microcomputer control, parameter real-time display.

Menu-type operation interface, simple and convenient, can quickly set temperature and time parameters.



Internal circulation system

Forced convection system.

Adopts high-quality fan and large impeller fan, has higher ventilation efficiency and better temperature uniformity.



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down.

The inner chamber is made of high-quality mirror stainless steel, with strong corrosion resistance.



Humanized design

Built-in observation window to make the objects in the chamber clear at a glance.

The anti-scalding design of the door handle makes it easy to open and close the door.

Safety



With over temperature control of visible & audible alarm system.



The insulation material is made of high-quality glass wool, and the insulation layer of the chamber is thickened.



Equipped with leakage protection device to ensure the safety of operators and other equipment in the laboratory.



Equipped with spare temperature control which ensures the product work normally even the main temperature control failed.



Application

It is a requisite device for strain storage, biological culture and scientific research in colleges and universities, biological, agricultural or scientific research sectors and other departments.



Optional

Programable temperature controller
RS485 port
UV sterilization device
Spare shelf

Specifications

Model		ICB-20	ICB-30	ICB-40	ICB-50	ICB-80	ICB-81	ICB-140	ICB-160	ICB-250	ICB-270
Capacity (L)		20	30	40	50	80	80	140	160	250	270
Circulation Mode		Forced convection				Forced convection					
Dimension (W*D*H)	Internal (mm)	250*250*320	300*300*350	350*350*350	350*350*410	400*400*500	450*400*450	500*500*550	500*500*650	600*600*700	600*600*750
	External (mm)	380*350*620	430*400*650	640*500*600	480*460*730	530*500*830	730*530*690	780*690*800	630*600*970	880*730*950	730*700*1070
Temperature	Range (°C)	RT+5 ~ 66	RT+5 ~ 66	RT+5 ~ 80	RT+5 ~ 66	RT+5 ~ 66	RT+5 ~ 80	RT+5 ~ 80	RT+5 ~ 66	RT+5 ~ 80	RT+5 ~ 66
	Fluctuation (°C)	±0.5				±0.5					
	Resolution (°C)	0.1				0.1					
	Uniformity (°C)	±1				±1					
	Sensor	PT100				PT100					
Controller		Microcomputer				Microcomputer					
Display		High definition LCD				High definition LCD					
Timer (min)		1 ~ 9999				1 ~ 9999					
Material	Internal	Mirror 304 stainless steel				Mirror 304 stainless steel					
	External	Coated cold rolled steel				Coated cold rolled steel					
Shelves		2	2	2	2	2	2	2	3	2	3
Exhaust Hole (mm)		Standard Ø28 top with function of test hole				Standard Ø28 top with function of test hole					
Safety Device		Over temperature visible & audible alarm, leakage protector, digital independent temp. limiter				Over temperature visible & audible, leakage protector, digital independent temp. limiter					
Electricity	Voltage/Frequency	AC 220 / 110V, 50 / 60Hz				AC 220 / 110V, 50 / 60Hz					
	Consumption (W)	150	180	450	250	300	700	850	450	1200	600
N.W. / G.W.(kg)		25 / 30	28 / 34	40 / 60	32 / 38	45 / 55	50 / 75	75 / 110	65 / 78	100 / 140	88 / 105
Shipping Dimension(W*D*H) (mm)		460*450*670	510*500*700	750*630*770	550*530*760	680*580*850	850*660*860	900*760*980	700*680*1000	1000*860*1100	800*780*1200
Optional		Programable temperature controller、RS485 port、UV sterilization device、spare shelf				Programable temperature controller、RS485 port、UV sterilization device、spare shelf					

Desktop Constant-Temperature Incubator

ICB-18 ICB-18E



Key Features



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.



Intelligent control

High definition digital display, with intelligent microcomputer control, parameter real-time display.

Sensor deviation correction, temperature auto-tuning, power-off parameter memory.



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down.

The inner chamber is made of high-quality mirror stainless steel, with strong corrosion resistance.



Humanized design

Built-in observation window to make the objects in the chamber clear at a glance.

The anti-scalding design of the door handle makes it easy to open and close the door.

Application

It is a requisite device for strain storage, biological culture and scientific research in colleges and universities, biological, agricultural or scientific research sectors and other departments.

Safety

The insulation material is made of high quality rock wool board, and the insulation layer of the chamber is thickened.

With over temperature control of visible & audible alarm system.

Optional

Spare shelf



Specifications

Model		ICB-18 / ICB-18E
Capacity		18L
Circulation Mode		Natural convection
Dimension (W*D*H)	Internal	260*260*260 mm
	External	380*455*568 mm
Temperature	Range	RT+5 ~ 65 C
	Fluctuation	±0.5 C
	Resolution	0.1 C
	Uniformity	±2.0 C
	Sensor	PT100
Controller		PID Intelligent
Display		Digital LED
Timer		0 ~ 9999 min (with timing wait function)
Material	Internal	Without E model: mirror stainless steel With E model: high strength galvanized sheet
	External	Cold rolled steel electrostatic spraying exterior
Shelves (Standard / Max)		2 / 6
Exhaust Hole		Standard Ø28mm top with function of test hole
Safety Device		Over temperature visible & audible alarm
Electricity	Voltage / Frequency	AC 220 / 110V, 50 / 60Hz
	Consumption	180W
N.W. / G.W.		27 / 35kg
Shipping Dimension (W*D*H)		480*520*630 mm
Optional		Spare shel

Heating Incubator

ICB-45E ICB-65E ICB-125E ICB-210E
 ICB-45 ICB-65 ICB-125 ICB-210



Key Features



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.

Automatically adjust the control parameters according to the ambient temperature and load to achieve the optimal heating method and reduce energy consumption.



Intelligent control

Intelligent PID control is adopted, and the parameters are displayed in real time.

Sensor deviation correction, temperature auto-tuning, power-off parameter memory.



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down.



Humanized design

Double door design, the inner door is made of tempered glass for easy observation, magnetic sealing design for outer door, good sealing.

The anti-scalding design of the door handle makes it easy to open and close the door.



The insulation material is made of premium foam, and the insulation layer of the chamber is thickened.



With over temperature control of visible & audible alarm system.

Application

It is a requisite device for strain storage, biological culture and scientific research in colleges and universities, biological, agricultural or scientific research sectors and other departments.

Optional

Spare shelf



ICB-45E ICB-65E ICB-125E ICB-210E
ICB-45 ICB-65 ICB-125 ICB-210



ICB-45E ICB-65E ICB-125E ICB-210E
ICB-45 ICB-65 ICB-125 ICB-210

Specifications

Model	ICB-45E	ICB-65E	ICB-125E	ICB-210E	ICB-45	ICB-65	ICB-125	ICB-210	
Capacity (L)	45	65	125	210	45	65	125	210	
Circulation Mode	Natural convection				Natural convection				
Dimension (W*D*H)	Internal (mm)	350*350*350	400*350*450	500*450*550	600*580*600	350*350*350	400*350*450	500*450*550	600*580*600
	External (mm)	525*480*620	575*480*720	675*580*820	775*710*870	525*480*620	575*480*720	675*580*820	775*710*870
Temperature	Range (°C)	RT+5~70				RT+5~70			
	Fluctuation (°C)	±0.5				±0.5			
	Resolution (°C)	0.1				0.1			
	Uniformity (°C)	±1.5				±1.5			
Sensor	PT100				PT100				
Controller	PID Intelligent				PID Intelligent				
Display	Digital LED				Digital LED				
Timer (min)	0~9999min (with timing wait function)				0~9999min (with timing wait function)				
Material	Internal	High strength galvanized sheet				Mirror stainless steel			
	External	Cold rolled steel electrostatic spraying exterior				Cold rolled steel electrostatic spraying exterior			
Shelves (Standard / Max)	2 / 7	2 / 10	2 / 13	2 / 14	2 / 7	2 / 10	2 / 13	2 / 14	
Exhaust Hole (mm)	Ø35mm top with function of test hole				Ø35mm top with function of test hole				
Safety Device	Over temperaure Visible& Audible alarm				Over temperaure Visible& Audible alarm				
Electricity	Voltage/Frequency	AC 220/110V, 50/60Hz				AC 220/110V, 50/60Hz			
	Consumption (W)	350	450	600	700	350	450	600	700
N.W. / G.W.(kg)	27/40	32/45	45/60	55/70	27/40	32/45	45/60	55/70	
Shipping Dimension(W*D*H) (mm)	595*562*795	645*562*885	745*662*990	845*792*1040	595*562*795	645*562*885	745*662*990	845*792*1040	
Optional	Spare shelf				Spare shelf				

Portable Incubator

ICB-P9



Key Features



Energy-saving

High temperature silicone seal for good leak-tightness.

Good heat insulation for preventing the loss of heat too quickly.



Intelligent control

Intelligent PID temperature control.

Simple and convenient operation, can quickly set temperature and time parameters.



Internal circulation system

Internal naturally air convection.

The four-sided heating method makes the internal temperature more uniform.



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down

Mirror stainless steel inner chamber, four corners arc transition easy to clean.



Humanized design

With high quality glass window and installed LED light on the door, which is convenient for observing internal samples, especially in dark conditions.

The anti-scalding design of the door handle makes it easy to open and close the door.

Portable design with handle on top for easy moving.

Application

It is used for industrial and mining enterprises, food processing, agriculture, biochemistry, biology, medicine industry of bacteria, microbe and other small culture experiments.

Safety

With sensor failure alarm, fixed value operation, timing operation, deviation correction, menu locking and other functions.

With over temperature control of visible & audible alarm system.

Optional

Vehicular (DC12V/AC110V/AC220V)

Spare shelf



Specifications

Model	ICB-P9	
Capacity	9.2L	
Circulation Mode	Natural convection	
Dimension (W*D*H)	Internal	230*200*200mm
	External	310*276*298mm
Temperature	Range	RT+5-65℃
	Fluctuation	±0.5℃
	Resolution	0.1℃
	Uniformity	±1.0℃
	Sensor	PT100
Controller	PID	
Display	LED	
Timer	0-9999 min (with timing waiting function)	
Material	Internal	Mirror stainless steel
	External	Cold rolled steel electrostatic spraying exterior
Shelves (Standard / Max)	2 / 4	
Safety Device	Over temperature sound and light alarm	
Electricity	Voltage / Frequency	AC220V/50/60HZ
	Consumption	80W
N.W. / G.W.	8 / 10 kg	
Shipping Dimension (W*D*H)	350*312*377mm	
Optional	Vehicular(DC12V/AC110V/AC220V), Spare shelf	

Constant Temperature Incubator

ICB-45P ICB-65P ICB-125P ICB-210P



Key Features



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.



Intelligent control

Large high definition LCD display, with intelligent PID control, parameter real-time display.

Sensor deviation correction, temperature auto-tuning, power-off parameter memory.



Internal circulation system

Bottom forced convection system.

Adopts high-quality fan and large impeller fan, has higher ventilation efficiency and better temperature uniformity.



Dedicated sheet metal processing

The inner chamber is made of high-quality mirror stainless steel, with strong corrosion resistance.



Humanized design

Double door design, the inner door is made of tempered glass for easy observation, magnetic sealing design for outer door, good sealing.

The anti-scalding design of the door handle makes it easy to open and close the door.

Application

It is a requisite device for strain storage, biological culture and scientific research in colleges and universities, biological, agricultural or scientific research sectors and other departments.

Safety

Digital independent temperature limiter.

The insulation material is made of premium foam, and the insulation layer of the chamber is thickened.

With over temperature control of visible & audible alarm system.

Optional

Spare shelf

USB port



Specifications

Model	ICB-45P	ICB-65P	ICB-125P	ICB-210P	
Capacity (L)	45	65	125	210	
Circulation Mode	Forced convection				
Dimension (W*D*H)	Internal (mm)	350*350*350	400*350*450	500*450*550	600*580*600
	External (mm)	525*480*620	575*480*720	675*580*820	775*710*870
Temperature	Range (°C)	RT+5 ~ 70			
	Fluctuation (°C)	0.5			
	Resolution (°C)	0.1			
	Uniformity (°C)	0.8			
	Sensor	PT100			
Controller	PID Intelligent				
Display	Large high definition LCD				
Timer (min)	0 ~ 9999 (with timing wait function)				
Material	Internal	Mirror stainless steel			
	External	Cold rolled steel electrostatic spraying exterior			
Shelves (Standard / Max)	2 / 7	2 / 9	2 / 13	2 / 14	
Exhaust Hole (mm)	Standard Ø28 top with function of test hole				
Safety Device	Over temperature visible & audible alarm, digital independent temp. limiter				
Electricity	Voltage/Frequency	AC 220 / 110V, 50 / 60Hz			
	Consumption (W)	350	450	600	700
N.W. / G.W.(kg)	27 / 30	32 / 35	45 / 49	58 / 63	
Shipping Dimension (W*D*H) (mm)	605*572*775	655*572*875	755*672*975	855*802*1025	
Optional	Spare shelf, USB port				

Cooling Biochemical Incubator

ICB-B80B ICB-B150B ICB-B250B

Key Features



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.

Automatically adjust the control parameters according to the ambient temperature and load to achieve the optimal heating method and reduce energy consumption.



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down.


The inner cavity is made of mirror stainless steel, which has strong corrosion resistance.



Intelligent control

Simple and convenient operation, can quickly set temperature and time parameters.

Intelligent PID controller (with temperature correction and timing function).



Humanized design

Built-in lighting, the door is equipped with an observation window for easy observation.

The left side of the cabinet is equipped with a test hole with a diameter of 30mm.



Internal circulation system

High-quality compressor, automatic control for hot and cold.

Adopts high-quality fan and large impeller fan, has higher ventilation efficiency and better temperature uniformity.



Safety

Self-diagnosis function, with over-temperature alarm and sensor failure alarm

Optional

Multi-segment programmable control

RS485 interface or printer and USB (choose one)

Spare shelf



Specifications

Model	ICB-B80B	ICB-B150B	ICB-B250B	
Capacity (L)	80	150	250	
Circulation Mode	Forced convection			
Dimension (W*D*H)	Internal (mm)	500*350*500	500*400*730	500*500*950
	External (mm)	640*600*1060	640*650*1300	640*750*1520
Temperature	Range (°C)	5-60°C		
	Fluctuation (°C)	±0.5		
	Resolution (°C)	0.1		
	Uniformity (°C)	±1		
Sensor	PT100			
Controller	Microcomputer control			
Display	High definition LCD			
Timer (min)	1-9999			
Material	Internal	Mirror 201 stainless steel		
	External	Galvanized sheet spraying		
Shelves (Standard / Max)	2 / 5	2 / 8	2 / 11	
Test Hole	Φ30mm			
Refrigerant	R134a (CFC free)			
Safety Device	Over temperature alarm, sensor failure alarm			
Electricity	Voltage/Frequency	AC 220/110V, 50/60Hz		
	Consumption (W)	300	500	800
N.W. / G.W.(kg)	55/68	67/85	79/100	
Shipping Dimension (W*D*H) (mm)	720*680*1170	720*720*1400	720*830*1610	
Optional	Multi-segment programmable control, RS485 interface or printer and USB (choose one), spare shelf			

Application

Biochemical incubators are suitable for scientific research and production departments such as environmental protection, medical treatment, sanitation, epidemic prevention, drug inspection, agriculture, livestock and aquaculture.

Cooling Biochemical Incubator

ICB-B70Z ICB-B100Z ICB-B150Z
 ICB-B250Z ICB-B350Z ICB-B450Z



ICB-B70Z ICB-B100Z



ICB-B150Z ICB-B250Z
 ICB-B350Z ICB-B450Z

Key Features



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.

High efficiency and energy saving compressor, stable temperature control and low power consumption.



Intelligent control

Large high definition LCD display, with intelligent microcomputer control, parameter real-time display.

Menu-type operation interface, simple and convenient, can quickly set temperature and time parameters.



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down, with a minimum spacing of 30mm.

The inner chamber is made of high-quality brushed stainless steel, with strong corrosion resistance.

Internal circulation system

Back suction and bottom forced convection system.

Adopts high-quality fan and large impeller fan, the machine has higher ventilation efficiency and better temperature uniformity.



Humanized design

Built-in observation window to make the objects in the chamber clear at a glance.



Equipped with leakage protection device to ensure the safety of operators and other equipment in the laboratory.



Self-diagnosis function: display fault information, which is convenient for judging the fault point.



Application

The product is applicable to scientific research institutes, colleges and production departments engaged in environmental protection, epidemic prevention, drug test, livestock and aquatic products. It's a dedicated thermostatic equipment for water analysis and measure, culture and conservation of bacteria, mucedine and microorganism, plant cultivation and breeding experiment.



Optional

Test hole, internal socket, Digital independent temperature limiter 、 Programable temperature controller (Optional USB,RS485/232 and built-in printer)、 Spare shelf

Specifications

Model	ICB-B70Z		ICB-B100Z		ICB-B150Z		ICB-B250Z		ICB-B350Z		ICB-B450Z		
Capacity (L)	70		100		150		250		350		450		
Circulation Mode	Forced convection						Forced convection						
Dimension (W*D*H)	Internal (mm)	450*350*450		510*390*510		550*390*800		560*420*1050		560*530*1200		700*530*1210	
	External (mm)	560*555*885		620*590*990		600*630*1460		660*660*1700		670*730*1880		810*790*1890	
Temperature	Range (°C)	0 ~ 60						0 ~ 60					
	Fluctuation (°C)	±0.5						±0.5					
	Resolution (°C)	0.1						0.1					
	Uniformity (°C)	±1						±1					
	Sensor	PT100						PT100					
Controller	PID						PID						
Display	Large high definition LCD						Large high definition LCD						
Timer (min)	1 ~ 9999						1 ~ 9999						
Material	Internal	Stainless steel						Stainless steel					
	External	Cold rolled steel electrostatic spraying exterior						Cold rolled steel electrostatic spraying exterior					
Shelves	2		2		3		3		3		4		
Test Hole (Optional)(mm)	Φ25, 50, 80, 100						Φ25, 50, 80, 100						
Refrigerant	R134a (CFC free)						R134a (CFC free)						
Safety Device	Leakage protector ,Audible alarm						Leakage protector ,Audible alarm						
Electricity	Voltage / Frequency	AC 220 / 110V, 50 / 60Hz						AC 220 / 110V, 50 / 60Hz					
	Consumption (W)	660		680		900		1000		1100		1600	
N.W./G.W. (kg)	55 / 70		56 / 87		73 / 115		98 / 140		125 / 170		158 / 200		
Shipping Dimension (W*D*H) (mm)	720*650*1050		700*730*1140		730*690*1610		800*760*1930		800*850*1900		900*1150*2080		
Optional	Test hole, internal socket, Digital independent temperature limiter 、 Programable temperature controller (Optional USB,RS485/232 and built-in printer)、 Spare shelf						Test hole, internal socket, Digital independent temperature limiter 、 Programable temperature controller (Optional USB,RS485/232 and built-in printer)、 Spare shelf						

BOD Refrigerated Incubator

ICB-B70E ICB-B150E ICB-B250E
 ICB-B70 ICB-B150 ICB-B250



Key Features



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.
 High efficiency and energy saving compressor, stable temperature control and low power consumption.



Internal circulation system

Back suction forced convection system.
 Adopts high-quality fan and large impeller fan, has higher ventilation efficiency and better temperature uniformity.
 Air cooled hermetic compressor with cooling system, effectively extend the life of the compressor.



Intelligent control

E model: Large high definition LCD display, with intelligent microcomputer control, parameter real-time display.
 Without E model: Large high definition LCD display, 30 segment program temperature with intelligent microcomputer control, parameter real-time display.



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down.
 The inner chamber is made of high-quality mirror stainless steel, with strong corrosion resistance.



Humanized design

Double door design, the inner door is made of tempered glass for easy observation, magnetic sealing design for outer door, good sealing.
 The anti-scalding design of the door handle makes it easy to open and close the door.



With over temperature control of visible & audible alarm system.



E model: Deviation correction, menu key lock, power failure parameter memory.



Without E model: Loop self diagnosis, sensor fault alarm.

Application

The product is applicable to scientific research institutes, colleges and production departments engaged in environmental protection, epidemic prevention, drug test, livestock and aquatic products.
 It's a dedicated thermostatic equipment for water analysis and measure, culture and conservation of bacteria, mucidine and microorganism, plant cultivation and breeding experiment.

Optional

Spare shelf , RS485 port, build-in printer, data recorder
,USB data storage

Specifications



ICB-B70E ICB-B150E ICB-B250E
ICB-B70 ICB-B150 ICB-B250

Model	ICB-B70E		ICB-B70	ICB-B150E	ICB-B150	ICB-B250E	ICB-B250
Capacity (L)	70		70	150	150	250	250
Circulation Mode	Forced convection				Forced convection		
Dimension (W*D*H)	Internal (mm)	415*350*500		415*350*500	490*400*750	500*500*950	500*500*950
	External (mm)	571*591*1051		571*591*1051	646*641*1301	656*741*1501	656*741*1501
Temperature	Range (°C)	0 ~ 65				0 ~ 65	
	Fluctuation (°C)	High Temp. : ±0.5 Low Temp. : ±1				High Temp. : ±0.5 Low Temp. : ±1	
	Resolution (°C)	0.1				0.1	
	Uniformity (°C)	±1.5				±1.5	
Sensor	PT100				PT100		
Controller	Microcomputer control				Microcomputer control		
Display	Large high definition LCD				Large high definition LCD		
Timer (h)	E model: 0 ~ 99.9				E model: 0 ~ 99.9		
	Without E model: 0 ~ 99.9 *30 segment (with timing wait function)				Without E model: 0 ~ 99.9 *30 segment (with timing wait function)		
Material	Internal	Mirror stainless steel				Mirror stainless steel	
	External	Cold rolled steel electrostatic spraying exterior				Cold rolled steel electrostatic spraying exterior	
Shelves (Standard / Max)	2 / 5	2 / 5	2 / 9	2 / 9	2 / 12	2 / 12	
Test Hole (mm)	Φ43				Φ43		
Internal Socket	Outer universal socket (one), inner waterproof socket (one)				Outer universal socket (one), inner waterproof socket (one)		
Refrigerant	R134a (CFC free)				R134a (CFC free)		
Safety Device	Over temperature visible & audible alarm				Over temperature visible & audible alarm		
Electricity	Voltage / Frequency	AC 220 / 110V, 50 / 60Hz				AC 220 / 110V, 50 / 60Hz	
	Consumption (W)	800	800	1000	1000	1200	1200
N.W. / G.W. (kg)	69 / 92	69 / 92	86 / 114	86 / 114	100 / 139	100 / 139	
Shipping Dimension (W*D*H) (mm)	676*680*1235	676*680*1235	751*730*1490	751*730*1490	761*830*1690	761*830*1690	
Optional	Spare shelf , RS485 port, build-in printer, data recorder ,USB data storage				Spare shelf , RS485 port, build-in printer, data recorder ,USB data storage		

BOD Incubator

ICB-B70P ICB-B150P ICB-B250P



Key Features



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.


High efficiency and energy saving compressor, stable temperature control and low power consumption.



Internal circulation system

Bottom forced convection system.

Adopts high-quality fan and large impeller fan, has higher ventilation efficiency and better temperature uniformity.



Dedicated sheet metal processing

The inner chamber is made of high-quality mirror stainless steel, with strong corrosion resistance.

Intelligent control

5.0 inches touch screen display, with intelligent microcomputer control, parameter real-time display.

Sensor deviation correction, temperature overshoot auto-tuning, power-off parameter memory, loop self diagnosis.



Humanized design

Double door design, the inner door is made of tempered glass for easy observation, magnetic sealing design outer door, with good sealing.

The anti-scalding design of the door handle makes it easy to open and close the door.

Application

The product is applicable to scientific research institutes, colleges and production departments engaged in environmental protection, epidemic prevention, drug test, livestock and aquatic products. It's a dedicated thermostatic equipment for water analysis and measure, culture and conservation of bacteria, mucedine and microorganism, plant cultivation and breeding experiment.

Safety

With over temperature control of visible & audible alarm system.

Temperature curve view, reservation start.

Standard UV sterilization device, digital independent temperature limiter.

Optional

Shelf, RS485 interface, printer, USB data storage



Specifications

Model	ICB-B70P	ICB-B150P	ICB-B250P	
Capacity (L)	70	150	250	
Circulation Mode	Forced convection			
Dimension (W*D*H)	Internal (mm)	420*350*500	500*500*600	600*500*840
	External (mm)	580*610*1190	660*760*1290	760*760*1530
Temperature	Range (°C)	0 ~ 65		
	Fluctuation (°C)	High Temp. : ±0.5 Low Temp. : ±1		
	Resolution (°C)	0.1		
	Uniformity (°C)	±1		
	Sensor	PT100		
Controller	Microcomputer control			
Display	5.0 inches touch screen			
Timer (h)	0 ~ 99.9*30 segment			
Material	Internal	Mirror stainless steel		
	External	Cold rolled steel electrostatic spraying exterior		
Shelves (Standard / Max)	2 / 9	2 / 12	2 / 18	
Test Hole (mm)	Φ43			
Refrigerant	R134a (CFC free)			
Internal Socket	Outer universal socket (one), inner waterproof socket (one)			
Safety Device	Over temperature visible & audible alarm, digital independent temp. limiter			
Electricity	Voltage / Frequency	AC 220 / 110V, 50 / 60Hz		
	Consumption (W)	800	1000	1200
N.W. / G.W. (kg)	69 / 92	86 / 114	100 / 139	
Shipping Dimension (W*D*H) (mm)	708*716*1368	788*866*1468	888*866*1708	
Optional	Shelf, RS485 interface, printer, USB data storage			

Cooling Biochemical Incubator

ICB-B80 II ICB-B150 II ICB-B200 II
ICB-B250 II ICB-B300 II ICB-B400 II



Key Features



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.

Automatically adjust the control parameters according to the ambient temperature and load to achieve the optimal heating method and reduce energy consumption.

High efficiency and energy saving compressor, stable temperature control and low power consumption.



Internal circulation system

High-quality compressor, automatic control for hot and cold.

Back suction forced convection system.

Adopts high-quality fan and large impeller fan, has higher ventilation efficiency and better temperature uniformity.



Intelligent control

Real-time parameter high definition LCD display, intelligent microcomputer control.

Simple and convenient operation, can quickly set temperature and time parameters.

Standard RS-485 communication interface



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down.

The inner chamber is made of 304 high-quality mirror stainless steel, with strong corrosion resistance.



Humanized design

Equipped with lamp inside, easy observation.

Equipped with power supply outlet inside chamber, easily provide electricity for small instruments.

The surface coated, good appearance and maintenance.

Double door design, the inner door is made of tempered glass for easy observation, magnetic sealing design for outer door, good sealing.

Safety



Over-temperature control sound alarm system.



Equipped with spare temperature control which ensures the product work normally even the main temperature control failed (for heating).



Equipped with leakage protection device to ensure the safety of operators and other equipment in the laboratory.



Application

Biochemical incubators are suitable for scientific research and production departments such as environmental protection, medical treatment, sanitation, epidemic prevention, drug inspection, agriculture, livestock and aquaculture.



Optional

Multi-segment programmable control
 Φ25mm (50mm) test hole
 Spare shelf
 USB port
 Printer

Specifications

Model	ICB-B80 II	ICB-B150 II	ICB-B200 II	ICB-B250 II	ICB-B300 II	ICB-B400 II	
Capacity (L)	80	150	200	250	300	400	
Circulation Mode	Forced convection			Forced convection			
Dimension (W*D*H)	Internal (mm)	400*370*550	450*420*850	450*450*1000	480*490*1070	520*500*1170	580*540*1270
	External (mm)	540*570*1070	590*620*1370	590*640*1520	620*680*1590	660*690*1690	720*740*1790
Temperature	Range (°C)	0~60			0~60		
	Fluctuation (°C)	High Temp.: ±0.5 Low Temp.: ±1			High Temp.: ±0.5 Low Temp.: ±1		
	Resolution (°C)	0.1			0.1		
	Uniformity (°C)	±1			±1		
	Sensor	PT100			PT100		
Controller	Microcomputer control			Microcomputer control			
Display	High definition LCD			High definition LCD			
Timer (min)	1~9999			1~9999			
Material	Internal	Mirror 304 stainless steel			Mirror 304 stainless steel		
	External	Coated cold rolled steel			Coated cold rolled steel		
Shelves (Standard / Max)	2 / 8	3 / 13	3 / 15	3 / 16	3 / 18	3 / 20	
Test Hole (mm)	Φ25mm (50mm)			Φ25mm (50mm)			
Refrigerant	R134a (CFC free)			R134a (CFC free)			
Safety Device	Over temperature Visible& Audible alarm,digital independent temp. limiter,leakage protector			Over temperature Visible& Audible alarm,digital independent temp. limiter,leakage protector			
Electricity	Voltage / Frequency	AC 220/110V, 50/60Hz			AC 220/110V, 50/60Hz		
	Consumption (W)	180	250	300	350	400	550
N.W. / G.W. (kg)	50/85	90/120	95/138	103/147	115/157	135/170	
Shipping Dimension (W*D*H) (mm)	700*730*1260	750*780*1560	750*800*1710	780*840*1780	820*850*1880	880*900*1980	
Optional	Multi-segment programmable control Φ25mm (50mm) test hole USB port Printer spare shelf			Multi-segment programmable control Φ25mm (50mm) test hole USB port Printer spare shelf			

Biochemical Cooling Incubator

ICB-B175P ICB-B275P ICB-B375P
 ICB-B475P ICB-B800P ICB-B1075P



Key Features



Energy-saving

The sealing ring of incubator adopts a new type of synthetic silicone sealing strip, which effectively prevents heat loss.

High efficiency and energy saving compressor, stable temperature control and low power consumption.



Internal circulation system

Back suction forced convection system.

Adopts high-quality fan and large impeller fan, has higher ventilation efficiency and better temperature uniformity.



Intelligent control

The sealing ring of incubator adopts a new type of synthetic silicone sealing strip, which effectively prevents heat loss.

Menu-type operation interface, Multi-segment program control, simple and convenient operation, can quickly set temperature and time parameters.



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down.

The inner chamber is made of 304 high-quality mirror stainless steel, with strong corrosion resistance.



Humanized design

Equipped with lamp inside, easy observation.

Equipped with power supply outlet inside chamber, easily provide electricity for small instruments.

The surface coated, good appearance and maintenance.

Double door design, the inner door is made of tempered glass for easy observation, magnetic sealing design for outer door, good sealing.

Safety



Over-temperature control sound alarm system



Equipped with spare temperature control which ensures the product work normally even the main temperature control failed (for heating)




Equipped with leakage protection device to ensure the safety of operators and other equipment in the laboratory.



Application

Biochemical incubators are suitable for scientific research and production departments such as environmental protection, medical treatment, sanitation, epidemic prevention, drug inspection, agriculture, livestock and aquaculture.

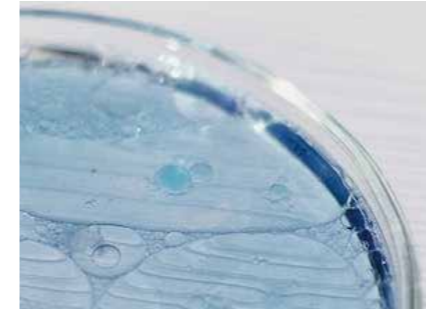

Optional

Φ25mm (50mm) test hole
RS485/232 port
Spare shelf

Specifications

Model	ICB-B175P	ICB-B275P	ICB-B375P	ICB-B475P	ICB-B800P	ICB-B1075P	
Capacity (L)	175	275	375	475	800	1075	
Circulation Mode	Forced convection			Forced convection			
Dimension (W*D*H)	Internal (mm)	450*420*930	580*510*935	590*550*1160	700*550*1250	965*610*1370	950*700*1600
	External (mm)	610*620*1500	740*710*1570	750*750*1730	860*750*1820	1130*930*1980	1010*900*2240
Temperature	Range (°C)	-10 ~ 75			-10 ~ 75		
	Fluctuation (°C)	±0.5			±0.5		
	Resolution (°C)	0.1			0.1		
	Uniformity (°C)	±1			±1		
	Sensor	PT100			PT100		
Controller	Microcomputer control			Microcomputer control			
Display	High definition LCD			High definition LCD			
Timer (min)	1 ~ 9999			1 ~ 9999			
Material	Internal	Mirror 304 stainless steel			Mirror 304 stainless steel		
	External	Coated cold rolled steel			Coated cold rolled steel		
Shelves (Standard / Max)	3 / 8	3 / 8	3 / 10	3 / 12	3 / 13	3 / 14	
Test Hole (mm)	Φ25, 2 pics			Φ25, 2 pics			
Internal Socket (Qty)	1			1			
Refrigerant	R134a (CFC free)			R134a (CFC free)			
Safety Device	Over temperature visible & audible alarm, digital independent temp. limiter, leakage protector			Over temperature visible & audible alarm, digital independent temp. limiter, leakage protector			
Electricity	Voltage / Frequency	AC 220 / 110V, 50 / 60Hz			AC 220 / 110V, 50 / 60Hz		
	Consumption (W)	800	1000	1250	1300	2300	2500
N.W. / G.W. (kg)	75 / 115	85 / 128	93 / 137	105 / 147	175 / 240	205 / 290	
Shipping Dimension (W*D*H) (mm)	920*820*1950	950*850*2100	1010*1000*2100	1010*1000*2250	1040*1240*2310	1200*1100*2550	
Optional	Φ25mm (50mm) test hole, RS485/232port, spare shelf			Φ25mm (50mm) test hole, RS485/232port, spare shelf			

Mould Incubator

ICB-M150Z ICB-M250Z ICB-M350Z ICB-M450Z



Key Features



Energy-saving

The sealing ring of incubator adopts a new type of synthetic silicone sealing strip, which effectively prevents heat loss.



Intelligent control

High definition LCD display, real-time display of parameters, self-locking function of screen, simple and convenient operation.

Menu-type operation interface, simple and convenient operation, can quickly set temperature and time parameters.



Internal circulation system

Adopts high-quality fan and large impeller fan, the machine has higher ventilation efficiency and better temperature uniformity.

The circulation system adopts the back suction and the bottom vertical air supply mode.

The shelf is laser hollowed out with round holes for better ventilation and better temperature uniformity.



Humanized design

Built in observation window to make the objects in the chamber clear at a glance.

The anti-scalding design of the door handle makes it easy to open and close the door.



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down, with a minimum spacing of 30mm.



Equipped with leakage protection device to ensure the safety of operators and other equipment in the laboratory.

With over temperature control of visible & audible alarm system.

Self-diagnosis function: display fault information, which is convenient for judging the fault point.

Application

It is widely used in mold screening, microbial tissue cell culture, fungal spore culture, food and drug, preservation experiments, seed germination and other test needs.

Optional

- 1.Independent temperature limiting controller
- 2.Intelligent LCD procedure temperature controller(Optional USB,RS485/232 and printer)



Specifications

Model	ICB-M150Z	ICB-M250Z	ICB-M350Z	ICB-M450Z
Capacity (L)	150	250	350	450
Circulation Mode	Forced convection			
Dimension (W*D*H)	Internal (mm)	505*380*800	550*450*1050	550*550*1150
	External (mm)	630*600*1450	680*660*1710	680*770*1870
Temperature	Range (°C)	4~60		
	Fluctuation (°C)	±0.5		
	Resolution (°C)	0.1		
	Uniformity (°C)	±1		
Sensor	PT100			
Controller	PID			
Display	LCD			
Timer (min)	1-9999			
Material	Internal	Stainless steel		
	External	Electro-galvanized steel with antimicrobial powder coating		
Shelves	3	3	3	4
Test Hole (mm)	Optional φ25,50,80,100			
Safety Device	Leakage protector/Over- temperature alarm			
Electricity	Voltage/Frequency	220/50		
	Consumption (W)	900	1000	1100
N.W. / G.W. (kg)	120	140	170	200
Shipping Dimension (W*D*H) (mm)	730*740*1630	800*760*1930	800*850*1900	900*1150*2080
Optional	1.Independent temperature limiting controller 2.Intelligent LCD procedure temperature controller(Optional USB, RS485/232 and printer)			

Constant Temperature Humidity Chamber

ICB-H70 ICB-H150 ICB-H250



Key Features



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.
High efficiency and energy saving compressor, stable temperature control and low power consumption.



Intelligent control

Large high definition LCD display, with intelligent PID control, parameter real-time display.
Sensor deviation correction, temperature auto-tuning, power-off parameter memory, loop self diagnosis.



Internal circulation system

Back suction forced convection system.
Unique internal air circulation structure design, fan breeze circulation, uniform temperature distribution in the work room.



Dedicated sheet metal processing

The inner chamber is made of high-quality mirror stainless steel, with strong corrosion resistance.



Humanized design

Double door design, the inner door is made of tempered glass for easy observation, magnetic sealing design for outer door, good sealing.
The anti-scalding design of the door handle makes it easy to open and close the door.

Application

The product is applicable to scientific research institutes, colleges and production departments engaged in environmental protection, epidemic prevention, drug test, livestock and aquatic products. It's a dedicated thermostatic equipment for water analysis and measure, culture and conservation of bacteria, mucedine and microorganism, plant cultivation and breeding experiment.

Safety

With over temperature control of visible & audible alarm system.
Digital independent temperature limiter.
Inner humidifying system with small particles, good humidity uniformity, low water consumption and function of alarm when is short of water.

Optional

Spare shelf , RS485 port, build-in printer, USB data storage



Specifications

Model	ICB-H70	ICB-H150	ICB-H250	
Capacity (L)	70	150	250	
Circulation Mode	Forced convection			
Dimension (W*D*H)	Internal (mm)	415*350*500	490*400*750	500*500*950
	External (mm)	571*591*1051	646*641*1301	656*741*1501
Temperature	Range (°C)	No humidification: 0 ~ 65 With humidification: 10 ~ 60		
	Fluctuation (°C)	High Temp.: ±0.5	Low Temp.: ±1	
	Resolution (°C)	0.1		
	Uniformity (°C)	±1		
Humidity	Sensor	PT100		
	Range	45% ~ 95%RH		
	Stability	±5%RH		
	Method	Internal		
Controller	PID			
Display	Large high definition LCD			
Timer (h)	0 ~ 99.99*30 segments (with timing wait function)			
Material	Internal	Mirror stainless steel		
	External	Cold rolled steel electrostatic spraying exterior		
Shelves(Standard / Max)	2 / 9	2 / 12	2 / 18	
Test Hole (mm)	Φ43			
External Socket	Universal socket (one)			
Refrigerant	R134a (CFC free)			
Defrosting Mode	Automatic			
Safety Device	Visible & audible over temperature, over humidity, water shortage alarm			
Electricity	Voltage/Frequency	AC 220 / 110V, 50 / 60Hz		
	Consumption (W)	1800	2000	2200
N.W. / G.W. (kg)	69 / 92	86 / 114	100 / 139	
Shipping Dimension (W*D*H) (mm)	686*690*1211	761*740*1461	771*840*1661	
Optional	Spare shelf , RS485 port, build-in printer, USB data storage			

Constant Temperature Humidity Chamber

ICB-H150 II ICB-H250 II ICB-H300 II
ICB-H400 II ICB-H800 II



Key Features



Energy-saving

The sealing ring of incubator adopts a new type of synthetic silicone sealing strip, which effectively prevents heat loss.

Automatically adjust the control parameters according to the ambient temperature and load to achieve the optimal heating method and reduce energy consumption.

High efficiency and energy saving compressor, stable temperature control and low power consumption.



Internal circulation system

Adopts high-quality fan and large impeller fan, the machine has higher ventilation efficiency and better temperature uniformity.

The circulation system adopts the back suction and the bottom vertical air supply mode.

The shelf is laser hollowed out with round holes for better ventilation and better temperature uniformity.



Intelligent control

Large-screen LCD display, real-time display of parameters, self-locking function of screen, simple and convenient operation.

Menu-type operation interface, simple and convenient operation, can quickly set temperature and time parameters.

With USB port to download data.



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down.

The inner tank is made of high-quality brushed stainless steel, with strong corrosion resistance.



Humanized design

Double door design, the inner door is made of tempered glass for easy observation, magnetic sealing design for outer door, good sealing.

Safety



With over temperature control of visible & audible alarm system



Equipped with spare temperature control which ensures the product work normally even the main temperature control failed (for heating)



Equipped with leakage protection device to ensure the safety of operators and other equipment in the laboratory.



Equipped with UV sterilization system

Application

The product is applicable to scientific research institutes, colleges and production departments engaged in environmental protection, epidemic prevention, drug test, livestock and aquatic products. It's a dedicated thermostatic equipment for water analysis and measure, culture and conservation of bacteria, mucidine and microorganism, plant cultivation and breeding experiment.

Optional

Programmable temperature controller

Printer

Φ25mm (50mm) test hole

RS485 port

Spare shelf

Specifications

Model	ICB-H150 II		ICB-H250 II		ICB-H300 II		ICB-H400 II		ICB-H800 II		
Capacity (L)	175		275		375		475		800		
Circulation Mode	Forced convection				Forced convection						
Dimension (W*D*H)	Internal (mm)	450*420*930		580*510*935		590*550*1160		700*550*1250		965*610*1370	
	External (mm)	630*720*1705		770*740*1710		780*870*1915		880*870*1995		1100*930*2170	
Temperature	Range (°C)	0~65				0~65					
	Fluctuation (°C)	High±0.5, Low±1				High±0.5, Low±1					
	Resolution (°C)	0.1				0.1					
	Uniformity (°C)	±1				±1					
	Sensor	PT100				PT100					
Humidity	Range	40~90%RH				40~90%RH					
	Stability	±3%RH				±3%RH					
	Method	Internal				Internal					
	Sensor	High precision anti-condensation				High precision anti-condensation					
Controller	PID				PID						
Display	Large high definition LCD				Large high definition LCD						
Timer (h)	0~99.99h*30 Segments*99 Cycles				0~99.99h*30 Segments*99 Cycles						
Material	Internal	Mirror stainless steel				Mirror stainless steel					
	External	Coated cold rolled steel				Coated cold rolled steel					
Shelves (Standard / Max)	3 / 8		3 / 8		3 / 10		3 / 12		3 / 13		
Test Hole (Optional) (mm)	Φ25mm (50mm)				Φ25mm (50mm)						
Refrigerant	R134a (CFC free)				R134a (CFC free)						
Defrosting Mode	Automatic				Automatic						
Safety Device	Visible& Audible over temperature, over humidity, water shortage alarm; leakage protector, spare temperature control				Visible& Audible over temperature, over humidity, water shortage alarm ;leakage protector, spare temperature control						
Electricity	Voltage/Frequency	AC 220/110V, 50/60Hz				AC 220/110V, 50/60Hz					
	Consumption (W)	1600		1800		2200		2250		4000	
N.W. / G.W. (kg)	174/212		205/256		222/319		289/352		360/468		
Shipping Dimension (W*D*H) (mm)	850*750*1880		960*870*1900		880*980*2100		1010*1000*2250		1250*1030*2280		
Optional	Programmable temperature controller ,Printer , RS485 port , Φ25mm (50mm) test hole ,Spare shelf				Programmable temperature controller ,Printer , RS485 port , Φ25mm (50mm) test hole ,Spare shelf						

Constant Temperature Humidity Chamber

ICB-H175 ICB-H275 ICB-H375
ICB-H475 ICB-H800 ICB-H1075



Key Features



Intelligent control

Large high definition LCD display, with intelligent microcomputer control, parameter real-time display.

Menu-type operation interface, simple and convenient, can quickly set temperature and time parameters.

With USB port to download data.

Standard built-in printer to record temperature humidity and time data in real time



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.

Automatically adjust the control parameters according to the ambient temperature and load to achieve the optimal heating method and reduce energy consumption.

High efficiency and energy saving compressor, stable temperature control and low power consumption.



Internal circulation system

Back suction forced convection system.

Adopts JAKEL high-quality fan and large impeller fan, has higher ventilation efficiency and better temperature uniformity.

Imported Danfoss compressor with cooling system, effectively extend the life of the compressor.



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down.

The inner chamber is made of 304 high-quality mirror stainless steel, with strong corrosion resistance.



Humanized design

Double door design, the inner door is made of tempered glass for easy observation, magnetic sealing design for outer door, good sealing.

The anti-scalding design of the door handle makes it easy to open and close the door.

Safety



With over temperature control of visible & audible alarm system.



Equipped with leakage protection device to ensure the safety of operators and other equipment in the laboratory.



Equipped with UV sterilization device.



Equipped with spare temperature control which ensures the product work normally even the main temperature control failed (for heating).



Imported brand humidity sensor, built-in tank heating humidification system, effectively ensuring the humidity deviation.

Application

The product has an accurate temperature and humidity control system, which provides various environmental simulation conditions required for industrial research and biotechnology testing, so it can be widely used in sterility tests such as pharmaceuticals, textiles, and food processing. Stability inspection and industrial products raw material performance, product packaging, product life and other tests.

Optional

Ø25mm/50mm test hole

RS485 port

Spare shelf

Specifications

Model	ICB-H175		ICB-H275		ICB-H375		ICB-H475		ICB-H800		ICB-H1075		
Capacity (L)	175		275		375		475		800		1075		
Circulation Mode	Forced convection						Forced convection						
Dimension (W*D*H)	Internal (mm)	450*420*930		580*510*935		590*550*1160		700*550*1250		965*610*1370		950*700*1600	
	External (mm)	610*620*1500		740*710*1570		750*750*1730		860*750*1820		1130*930*1980		1010*900*2240	
Temperature	Range (°C)	0 ~ 65						0 ~ 65					
	Fluctuation (°C)	High ±0.5, Low ±1						High ±0.5, Low ±1					
	Resolution (°C)	0.1						0.1					
	Uniformity (°C)	±1						±1					
	Sensor	PT100						PT100					
Humidity	Range	30 ~ 95%RH						30 ~ 95%RH					
	Stability	±3%RH						±3%RH					
	Method	Internal						Internal					
	Sensor	High precision anti-condensation						High precision anti-condensation					
Controller	PID						PID						
Display	Large high definition LCD						Large high definition LCD						
Timer (h)	0 ~ 99.99*30 segments*99 cycles						0 ~ 99.99*30 segments*99 cycles						
Material	Internal	Mirror stainless steel						Mirror stainless steel					
	External	Coated cold rolled steel						Coated cold rolled steel					
Shelves (Standard / Max)	3 / 8		3 / 8		3 / 10		3 / 12		3 / 13		3 / 14		
Test Hole (Optional) (mm)	Ø25, 50						Ø25, 50						
Refrigerant	R134a (CFC free)						R134a (CFC free)						
Defrosting Mode	Automatic						Automatic						
Safety Device	Visible & audible over temperature, over humidity, water shortage alarm leakage protector, spare temperature control.						Visible & audible over temperature, over humidity, water shortage alarm leakage protector, spare temperature control.						
Electricity	Voltage/Frequency	AC 220 / 110V, 50 / 60Hz						AC 220 / 110V, 50 / 60Hz					
	Consumption (W)	1100		1400		1950		2000		2300		2600	
N.W. / G.W. (kg)	82 / 125		95 / 138		103 / 147		115 / 157		185 / 250		215 / 300		
Shipping Dimension (W*D*H) (mm)	850*750*1880		960*870*1900		880*980*2100		1010*1000*2250		1290*1070*2320		1290*1170*2600		
Optional	RS485 port, Ø25mm (50mm) test hole, spare shelf						RS485 port, Ø25mm (50mm) test hole, spare shelf						

Plant Growth Chamber

ICB-L250B ICB-L350B ICB-L450B

Key Features



Energy-saving

Imported compressor, safe and reliable.

Defrosting function: three-stage electric heating defrosting program control.



Intelligent control

Large high definition LCD display, with intelligent microcomputer control, parameter real-time display.

The intelligent temperature control system can continuously control temperature, light level and running time.



Internal circulation system

Back suction and bottom forced convection system.

Adopts high-quality fan and large impeller fan, the machine has higher ventilation efficiency and better temperature uniformity.



Dedicated sheet metal processing

The inner chamber is made of high-quality brushed stainless steel, with strong corrosion resistance.



Humanized design

Built-in observation window to make the objects in the chamber clear at a glance.

The anti-scalding design of the door handle makes it easy to open and close the door.



Equipped with leakage protection device to ensure the safety of operators and other equipment in the laboratory.

Digital independent temperature limiter control sound and light alarm system.

Self-diagnosis function: display fault information, which is convenient for judging the fault point.

Application

It is widely applied to microbial tissue and cell culture, seed germination, seedling culture test, plant cultivation, raising of insects and small animals, etc. Different environmental and climatic conditions can be accurately simulated.

Optional

Test hole, internal socket, Digital independent temperature limiter、Programable temperature controller (Optional USB,RS485/232 and built-in printer)、Spare shelf



Specifications

Model	ICB-L250B	ICB-L350B	ICB-L450B	
Capacity (L)	250	350	450	
Circulation Mode	Forced convection			
Dimension (W*D*H)	Internal (mm)	555*450*1100	550*550*1200	700*550*1200
	External (mm)	680*680*1760	780*780*1900	1030*780*1900
Temperature	Range (℃)	With lighting: 10 ~ 60	Without lighting: 4 ~ 60	
	Fluctuation (℃)	±1		
	Resolution (℃)	0.1		
	Uniformity (℃)	±1	±2	±2
	Sensor	PT100		
Illumination (Lx)	0 ~ 12000	0 ~ 15000	0 ~ 20000	
Illumination Control	6-level relative illuminance control			
Controller	PID			
Display	Large high definition LCD			
Timer (min)	1 ~ 9999 (Optional 30*segments*100 cycles)			
Material	Internal	Stainless steel		
	External	Cold rolled steel electrostatic spraying exterior		
Shelves	3	3	4	
Test Hole (Optional) (mm)	Φ 25, 50, 80			
Refrigerant	R134a (CFC free)			
Defrosting Mode	Automatic			
Safety Device	Visible & audible over temperature, over humidity, water shortage alarm; leakage protector			
Electricity	Voltage / Frequency	AC 220 / 110V, 50 / 60Hz		
	Consumption (W)	640	1600	1750
N.W. / G.W. (kg)	110 / 162	139 / 260	175 / 290	
Shipping Dimension (W*D*H) (mm)	820*770*1930	900*940*2080	1140*910*2090	
Optional	Test hole, internal socket, Digital independent temperature limiter、Programable temperature controller (Optional USB,RS485/232 and built-in printer)、Spare shelf			

Illumination Chamber

ICB-L150E ICB-L260E ICB-L300E
ICB-L500E ICB-L1000E




Key Features



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.

High efficiency and energy saving compressor, stable temperature control and low power consumption.

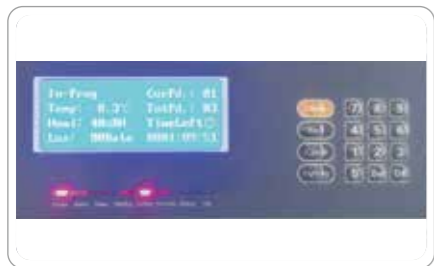

Intelligent control

Large high definition LCD display, with intelligent PID control, parameter real-time display.

It can simulate the temperature changes of nature during the day and night.

The intelligent temperature control system can continuously control temperature, light level and running time.



ICB-L1000E



Internal circulation system

Forced convection system.

Adopts high-quality fan and large impeller fan, has higher ventilation efficiency and better temperature uniformity.



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down.

The inner chamber is made of high-quality stainless steel, with strong corrosion resistance.



Humanized design

Built-in observation window to make the objects in the chamber clear at a glance.

The anti-scalding design of the door handle makes it easy to open and close the door.



Digital independent temperature limiter, with over temperature control of visible & audible alarm system.



With sterilization function, set the sterilization time, and automatically turn off the sterilization function at the end of the sterilization time.



The parameters set by the user can be automatically stored in case of power cut, it will run the original setting program after power restored.

Application

It is widely used in microbial tissue and cell culture, seed germination, seedling raising test, plant cultivation, insect and small animal feeding, etc. Different environmental and climatic conditions can be accurately simulated.

Optional

Spare shelf

Specifications



ICB-L150E
ICB-L260E
ICB-L300E



Model	ICB-L150E		ICB-L260E		ICB-L300E		ICB-L500E		ICB-L1000E			
Capacity (L)	150		260		300		500		1000			
Circulation Mode	Forced convection				Forced convection							
Dimension (W*D*H)	Internal (mm)	424*430*962		480*480*1040		480*480*1290		690*533*1375		1110*600*1370		
	External (mm)	525*540*1580		580*630*1755		580*630*1895		810*703*1864		1230*708*1865		
Temperature	Range (°C)	0 ~ 50				0 ~ 50						
	Fluctuation (°C)	±0.5				±0.5						
	Resolution (°C)	±0.1				±0.1						
	Uniformity (°C)	±0.1				±0.1						
Sensor	PT100				PT100							
Illumination (Lx)	0 ~ 8000 (can be customized)				0 ~ 8000 (can be customized)						0 ~ 12000 (can be customized)	
Illumination Control	10-level relative illuminance control				10-level relative illuminance control							
Controller	PID				PID							
Display	Large high definition LCD				Large high definition LCD							
Timer (h)	0 ~ 24*99 segments				0 ~ 24*99 segments							
Material	Internal	Mirror stainless steel				Mirror stainless steel						
	External	Cold rolled steel electrostatic spraying exterior				Cold rolled steel electrostatic spraying exterior						
Shelves	2		2		2		3		6			
Refrigerant	R134a (CFC free)				R134a (CFC free)							
Defrosting Mode	Automatic				Automatic							
Safety Device	Visible & audible over temperature alarm				Visible & audible over temperature alarm							
Electricity	Voltage / Frequency	AC 220, 50 / 60Hz				AC 220, 50 / 60Hz						
	Consumption (W)	400		400		600		600		700		
N.W. / G.W. (kg)	90 / 100		105 / 120		135 / 150		180 / 210		290 / 310			
Shipping Dimension (W*D*H) (mm)	670*670*1770		710*670*1930		670*705*2060		950*780*2020		1340*780*2020			
Optional	Spare shelf				Spare shelf							

Artificial Climate Chamber

ICB-CC268Y ICB-CC310Y ICB-CC500Y ICB-CC1000Y



Key Features



Energy-saving

The sealing ring of incubator adopts a new type of synthetic silicone sealing strip, which effectively prevents heat loss.

Automatically adjust the control parameters according to the ambient temperature and load to achieve the optimal heating method and reduce energy consumption.

High efficiency and energy saving compressor, stable temperature control and low power consumption.



Humanized design

Built in observation window to make the objects in the chamber clear at a glance

The anti-scalding design of the door handle makes it easy to open and close the door.



Intelligent control

Real-time parameter high definition LCD display, intelligent PID control.

It can simulate the temperature changes of nature during the day and night.

Micro-computer control, integrated control panel. The parameters can be set are: time, temperature, light, humidity, period etc.



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down.

The inner chamber is made of high-quality stainless steel, with strong corrosion resistance.



Internal circulation system

Forced convection system.

Adopts high-quality fan and large impeller fan, has higher ventilation efficiency and better temperature uniformity.

Application

It is widely used in microbial tissue and cell culture, seed germination, seedling raising test, plant cultivation, insect and small animal feeding, etc. Different environmental and climatic conditions can be accurately simulated.

Optional

Shelf



Independent temperature limit alarm system, giving sound and visual alarm to prompt operator, ensuring safe operation of equipment.

With over temperature control of visible& audible alarm system

With sterilization function, set the sterilization time, and automatically turn off the sterilization function at the end of the sterilization time.

The parameters set by the user can be automatically stored in case of power cut, it will run the original setting program after power restored.



Specifications

Model	ICB-CC268Y	ICB-CC310Y	ICB-CC500Y	ICB-CC1000Y
Capacity (L)	250	300	450	900
Circulation Mode	Forced convection			
Dimension (W*D*H)	Internal (mm)	480*480*1040	480*480*1290	690*533*1375
	External (mm)	580*630*1755	580*630*1895	810*703*1864
Temperature	Range (°C)	0~50		
	Fluctuation (°C)	±0.5		
	Resolution (°C)	±0.1		
	Uniformity (°C)	±0.1		
Humidity	Sensor	PT100		
	Range	50-95%RH		
Illumination(Lx)	Stability	±7%RH		
		0~8000 (can be customized)		0~12000 (can be customized)
Illumination Control	10-level relative illuminance control			
Controller	PID			
Display	LCD			
Timer	0~24h * 99 segments			
Material	Internal	Stainless steel		
	External	Sheet metal spraying		
Shelves	2	2	3	2
Refrigerant	R134a (CFC free)			
Defrosting Mode	Automatic			
Safety Device	Visible& Audible over temperature alarm			
Electricity	Voltage/Frequency	220±22V, 50±0.5HZ		
	Consumption (W)	400	600	600
N.W. / G.W. (kg)	78/125	110/135	138/158	166/200
Shipping Dimension (W*D*H) (mm)	710*670*1930	670*705*2060	950*780*2020	1340*780*2020
Optional	Spare shelf			

Plant Growth Chamber

ICB-CC250H

ICB-CC350H

Key Features



Energy-saving

Adopts energy-saving LED cold light source; The light intensity is adjustable in six levels to meet plants with different light needs.

Intelligent control of humidification method instrument.



Intelligent control

Large high definition LCD display, with intelligent microcomputer control, parameter real-time display.



Internal circulation system

Back suction and bottom forced convection system.

Adopts high-quality fan and large impeller fan, the machine has higher ventilation efficiency and better temperature uniformity.



Dedicated sheet metal processing

The inner chamber is made of high-quality brushed stainless steel, with strong corrosion resistance.



Humanized design

The anti-scalding design of the door handle makes it easy to open and close the door.

Application

It is widely used in microbial tissue and cell culture, seed germination, seedling raising test, plant cultivation, insect and small animal feeding, etc. Different environmental and climatic conditions can be accurately simulated.



Optional

Test hole, internal socket, Digital independent temperature limiter, Programmable temperature controller (Optional USB, RS485/232 and built-in printer), Spare shelf



Specifications

Model	ICB-CC250H	ICB-CC350H
Capacity (L)	250	350
Circulation Mode	Forced convection	
Dimension (W*D*H)	Internal (mm)	555*450*1100
	External (mm)	680*680*1760
Temperature	Range (°C)	With lighting: 10 ~ 60 ; Without lighting: 4 ~ 60
	Fluctuation (°C)	±1
	Resolution (°C)	0.1
	Uniformity (°C)	±1
	Sensor	PT100
Humidity	Range	50 ~ 90%RH
	Stability	±5 ~ ±7 %
	Method	Internal
	Sensor	High precision anti-condensation
Illumination (Lx)	0 ~ 12000	0 ~ 15000
Illumination Control	6-level relative illuminance control	
Controller	PID	
Display	Large high definition LCD	
Timer (min)	1 ~ 9999 (Optional 30*segments*100 cycles)	
Material	Internal	Stainless steel
	External	Cold rolled steel electrostatic spraying exterior
Shelves	3	
Test Hole (Optional) (mm)	Φ 25, 50, 80, 100	
Refrigerant	R134a (CFC free)	
Defrosting Mode	Automatic	
Safety Device	Visible & audible over temperature, over humidity, water shortage alarm; leakage protector	
Electricity	Voltage / Frequency	AC 220 / 110V, 50 / 60Hz
	Consumption (W)	880
N.W. / G.W. (kg)	120 / 130	155 / 260
Shipping Dimension (W*D*H) (mm)	780*740*1880	900*940*2080
Optional	Test hole, internal socket, Digital independent temperature limiter, Programmable temperature controller (Optional USB, RS485/232 and built-in printer), Spare shelf	



Equipped with leakage protection device to ensure the safety of operators and other equipment in the laboratory.

Digital independent temperature limiter control sound and light alarm system.

Self-diagnosis function: display fault information, which is convenient for judging the fault point.

Climate Chamber

ICB-CC175-3 ICB-CC275-3 ICB-CC375-3
 ICB-CC475-3 ICB-CC800-3 ICB-CC1075-3



Intelligent control

Large high definition LCD display, with intelligent microcomputer control, parameter real-time display.

The parameters set by the user can be automatically stored in case of power cut, it will run the original setting program after power restored.

With USB port to download data.

Standard built-in printer to record temperature humidity and time data in real time

Key Features



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.

High efficiency and energy saving compressor, stable temperature control and low power consumption.



Internal circulation system

Back suction forced convection system.

Adopts JAKEL high-quality fan and large impeller fan, has higher ventilation efficiency and better temperature uniformity.

Imported Danfoss compressor with cooling system, effectively extend the life of the compressor.



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down.

The inner chamber is made of 304 high-quality mirror stainless steel, with strong corrosion resistance.



Humanized design

Double door design, the inner door is made of tempered glass for easy observation, magnetic sealing design for outer door, good sealing.

The anti-scalding design of the door handle makes it easy to open and close the door.

With USB port to download data.

Safety



Equipped with leakage protection device to ensure the safety of operators and other equipment in the laboratory.



Equipped with spare temperature control which ensures the product work normally even the main temperature control failed.



Self-diagnosis function: display fault information, which is convenient for judging the fault point.



Digital independent temperature limiter, with over temperature control of visible & audible alarm system.

Application

This product is a high-precision hot and cold constant temperature equipment with automatic control of light and humidity. It can be used for plant germination and seedling cultivation, microbial culture, BOD determination for water quality monitoring, and constant temperature test for other purposes. It is an ideal test equipment for production, scientific research and teaching departments in biological genetic engineering, medicine, agriculture, forestry, environmental science, animal husbandry, aquatic products, etc.

Optional

φ25mm/50mm test hole

RS485 port

Spare shelf

Specifications

Model	ICB-CC175-3	ICB-CC275-3	ICB-CC375-3	ICB-CC475-3	ICB-CC800-3	ICB-CC1075-3	
Capacity (L)	175	275	375	475	800	1075	
Circulation Mode	Forced convection			Forced convection			
Dimension (W*D*H)	Internal (mm)	450*420*930	580*510*935	590*550*1160	700*550*1250	960*610*1370	950*700*1600
	External (mm)	610*620*1500	740*710*1570	750*750*1730	860*750*1820	1130*930*1980	1010*900*2240
Temperature	Range (°C)	With light: 10 ~ 55 Without light: 5 ~ 55			With light: 10 ~ 55 Without light: 5 ~ 55		
	Fluctuation (°C)	≤±1			≤±1		
	Resolution (°C)	0.1			0.1		
	Uniformity (°C)	≤±1			≤±1		
	Sensor	PT100			PT100		
Humidity	Range	30 ~ 95%RH			30 ~ 95%RH		
	Stability	±3%RH			±3%RH		
	Method	Internal			Internal		
	Sensor	High precision anti-condensation			High precision anti-condensation		
Illumination (Lx)	0 ~ 10000	0 ~ 15000	0 ~ 20000	0 ~ 23000	0 ~ 25000	0 ~ 25000	
Controller	Microcomputer			Microcomputer			
Display	Large high definition LCD			Large high definition LCD			
Timer (h)	1 ~ 99.9*30 segments			1 ~ 99.9 *30 segments			
Material	Internal	Mirror stainless steel			Mirror stainless steel		
	External	Coated cold rolled steel			Coated cold rolled steel		
Shelves (Standard / Max)	3 / 16	3 / 16	3 / 21	3 / 22	3 / 22	3 / 22	
Test Hole (Optional) (mm)	φ25, 50			φ25, 50			
Refrigerant	R134a (CFC free)			R134a (CFC free)			
Defrosting Mode	Automatic			Automatic			
Safety Device	Visible & audible over temperature, over humidity, water shortage alarm; leakage protector, spare temperature control.			Visible & audible over temperature, over humidity, water shortage alarm; leakage protector, spare temperature control.			
Electricity	Voltage / Frequency	AC 220 / 110V, 50 / 60Hz			AC 220 / 110V, 50 / 60Hz		
	Consumption (W)	860	1700	2100	4000	5000	6000
N.W. / G.W. (kg)	180 / 234	211 / 267	249 / 339	306 / 369	368 / 518	450 / 620	
Shipping Dimension (W*D*H) (mm)	750*840*1860	1010*900*1880	880*980*2100	1010*1000*2250	1290*1070*2320	1290*1170*2600	
Optional	RS485 port , φ25mm (50mm) test hole , spare shelf			RS485 port , φ25mm (50mm) test hole , spare shelf			

CO₂ Incubator

ICB-CO2-80E ICB-CO2-160E

Key Features



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.

Automatically adjust the control parameters according to the ambient temperature and load to achieve the optimal heating method and reduce energy consumption.



Dedicated sheet metal processing

The inner chamber is made of 304 high-quality mirror stainless steel, with strong corrosion resistance.



Intelligent control

Digital display, with intelligent microcomputer control, parameter real-time display.

Button operation, simple and convenient, can quickly set temperature and time parameters.



Humanized design

Double door design, the inner door is made of tempered glass for easy observation, magnetic sealing design for outer door, good sealing.

Natural evaporation for humidification to ensure the chamber can maintain good humidity.



With over temperature control of visible & audible alarm system.

Alarm function for lack of water, unspirated, ensuring the safe operation of the equipment.

Equipped with sterile air filtration devices and UV sterilization device to reduce pollution.



Internal circulation system

Top forced convection system.

Adopts high-quality fan and large impeller fan, has higher ventilation efficiency and better temperature uniformity.

Application

CO₂ Incubator is widely used in modern medicine, biology, chemistry and agriculture science for the culture of biological cells, tissues and bacterial.

Optional

HEPA filter, spare shelf, pressure reducing valve.



Specifications

Model		ICB-CO2-80E	ICB-CO2-160E
Capacity (L)		80	160
Circulation Mode		Forced convection	
Dimension (W*D*H)	Internal (mm)	400*400*500	500*500*650
	External (mm)	570*590*930	690*690*1030
Temperature	Range (°C)	RT+3 ~ 60	
	Fluctuation (°C)	≤±0.2	
	Resolution (°C)	0.1	
	Uniformity (°C)	≤±0.3	
Humidity	Sensor	PT100	
	Range	Ambient ~ 95%	
	Method	Natural vaporization	
CO ₂	Range	0 ~ 20%	
	Fluctuation	± 0.1%	
	Sensor	Flow meter	
Controller		PID	
Display		Digital LED	
Timer (min)		1 ~ 9999	
Material	Internal	304 Stainless steel	
	External	Coated cold rolled steel	
Shelves (Standard / Max)		2 / 10	2 / 13
Test Hole (mm)		Φ 16 on glass door	
Safety Device		Visible & audible over temperature alarm; leakage protector	
Electricity	Voltage/Frequency	AC 220 / 110V, 50 / 60Hz	
	Consumption (W)	600	900
N.W. / G.W. (kg)		55 / 85	75 / 110
Shipping Dimension (W*D*H) (mm)		740*680*1100	850*750*1250
Optional		HEPA filter, spare shelf, pressure reducing valve.	

CO₂ Incubator

ICB-CO2-80 ICB-CO2-160



Key Features



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.

Automatically adjust the control parameters according to the ambient temperature and load to achieve the optimal heating method and reduce energy consumption.



Dedicated sheet metal processing

The inner chamber is made of 304 high-quality mirror stainless steel, with strong corrosion resistance.



Intelligent control

Large touch screen, with intelligent microcomputer control, parameter real-time display.

The water jacket adopts three probes to control the chamber temperature, water temperature and door temperature respectively.

Internal circulation system

Top forced convection system.

Adopting PID control, the CO₂ concentration can be freely set within range of 0 to 20%, alarm for over concentration and concentration rise too slow.



Humanized design

Double door design, the inner door is made of tempered glass for easy observation, magnetic sealing design for outer door, good sealing.

Natural evaporation for humidification to ensure the chamber can maintain good humidity.

Application

CO₂ Incubator is widely used in modern medicine, biology, chemistry and agriculture science for the culture of biological cells, tissues and bacterial.

Optional

HEPA filter, spare shelf, pressure reducing valve.



Specifications

Model	ICB-CO2-80	ICB-CO2-160
Capacity (L)	80	160
Circulation Mode	Forced convection	
Dimension (W*D*H)	Internal (mm)	400*400*500
	External (mm)	570*590*930
Temperature	Range (°C)	RT+3 ~ 60
	Fluctuation (°C)	≤±0.2
	Resolution (°C)	0.1
	Uniformity (°C)	≤±0.3
Humidity	Sensor	PT100
	Range	Ambient ~ 95%
CO ₂	Method	Natural vaporization
	Range	0 ~ 20%
	Fluctuation	± 0.1%
	Sensor	IR
Controller	PID controller	
Display	Large touch screen	
Timer (min)	1~9999min	
Material	Internal	304 stainless steel
	External	Coated cold rolled steel
Shelves (Standard / Max)	2 / 10	2 / 13
Test Hole (mm)	Φ 16 on glass door	
Safety Device	Visible & audible over temperature alarm; leakage protector	
Electricity	Voltage/Frequency	AC 220 / 110V, 50 / 60Hz
	Consumption (W)	600
N.W. / G.W. (kg)	55 / 85	75 / 110
Shipping Dimension (W*D*H) (mm)	850*750*1250	
Optional	HEPA filter ,spare shelf , pressure reducing valve	

SAFETY

With over temperature control of visible & audible alarm system.

Alarm function for lack of water, unspirated, ensuring the safe operation of the equipment.

Equipped with sterile air filtration devices and UV sterilization device to reduce pollution.

CO₂ Incubator

ICB-CO2-260

Key Features



Energy-saving

Adopts new synthetic silicone sealing, better sealing effect, preventing heat loss effectively.



Intelligent control

Large high definition LCD display, with intelligent microcomputer control, parameter real-time display.


Dual beam IR CO₂ sensor: Fast and accurate monitoring of CO₂ levels, independent of temperature and humidity.



Internal circulation system

Top forced convection system.

HEPA filter: Keep the gas in the incubator clean



Dedicated sheet metal processing

The shelf can be disassembled and can be freely adjusted up and down.

The inner chamber is made of high-quality mirror stainless steel, with strong corrosion resistance.



Humanized design

Double door design, the inner door is made of tempered glass for easy observation, magnetic sealing design for outer door, good sealing.

Natural humidification using water tray.

6 sides direct heating system: The entire side can be directly heated to ensure stable and uniform temperature.



Equipped with over heating limit device to ensure the safety of operators and other equipment in the laboratory.

With over temperature control of visible & audible alarm system
Buzzer alarm for deviation of CO₂.

Application

The incubator is ideal for the experiments of the cultivation of animal cells, sperm/ovum, anaerobic cells, all sorts of microbe cells, hatching/germinating and special tissues.

Optional

TPressure Reducing Valve, RS232/RS485 communication interface, UV sterilization, HEPA Filter, Test hole, independent chamber compartment, spare shelf



Specification

Model		ICB-CO2-260
Capacity (L)		260
Circulation Mode		Forced convection
Sterilization Mode		120 C dry heat sterilization
Dimension (W*D*H)	Internal (mm)	530*590*900
	External (mm)	630*680*1125
Temperature	Range (C)	RT+5~60
	Fluctuation (C)	±0.1(37 C)
	Resolution (C)	0.1
	Uniformity (C)	±0.4 (37 C / RT.20 C)
Humidity	Sensor	PT100
	Method	Natural vaporization
CO ₂	Range	0~20%
	Uniformity	±0.1%
	Resolution	0.10%
	Sensor	IR
Controller		PID microcomputer
Display		LED
Material	Internal	304 stainless steel
	External	Plastic sprayed stainless steel
Shelves (Standard / Max)		3/ 8
Test Hole (Optional) (mm)		Φ 30mm
Safety Device		CO ₂ , temperature deviation buzzer alarm
Electricity	Voltage / Frequency	AC 220/110V, 50/60Hz
	Consumption (W)	610
N.W. / G.W. (kg)		115/ 140
Shipping Dimension (W*D*H) (mm)		830*880*1325
Optional		Pressure Reducing Valve, RS232/RS485 communication interface, UV sterilization, HEPA Filter, Test hole, independent chamber compartment, spare shelf

Shaking Incubator

ICB-S20 ICB-S50 ICB-S80I ICB-S80II



Key Features



Intelligent control

Large high definition LCD display, with intelligent microcomputer control, parameter real-time display.



Cooling system

Imported compressor with cooling system, effectively extend the life of the compressor (ICB-S80I ICB-S80II).

Brushless DC motor, more stable and reliable.



Dedicated sheet metal processing

The inner chamber is made of mirror stainless steel, with strong corrosion resistance.



Humanized design

The anti-scalding design of the door handle makes it easy to open and close the door.

With observation door to make the objects in the chamber clear at a glance.

Safety

With over temperature control of visible & audible alarm system.

With operation data memory function to eliminate faulty operation.

Auto-stop operation when door is opened. Strong air spring rod with easy opening and closing.

Equipped with leakage protection device to ensure the safety of operators and other equipment in the laboratory.

Application

The oscillator (commonly known as a shaker) is one of the main equipment for microbial culture. Select special motor, temperature control, speed measurement main components are imported, widely used in biology, medicine, pharmaceutical food, environmental protection and agricultural scientific research.

Optional

Various flask clamps,
Universal spring clamp



Specifications

Model	ICB-S20	ICB-S50	ICB-S80I	ICB-S80II
Capacity (L)	18	48	67	69
Circulation	Forced convection			
Shake Mode	Convolution			
Orbit Diameter (mm)	Φ26			
Cyclotron Frequency	Range (rpm/min) 0 (to do static culture), 20 ~ 300 Resolution (rpm) ±1			
Temperature	Range (°C)	RT+5 ~ 60	RT+5 ~ 60	10 ~ 60
	Fluctuation (°C)	≤0.1 (37°C)		
	Resolution (°C)	± 0.1		
Dimension (W*D*H)	Uniformity (°C)	± 1 (37°C)		
	Internal (mm)	320*295*190	440*405*270	445*482*315
	External (mm)	440*410*390	600*580*510	755*780*580
Flask Clamp	Max. capacity	50ml*12 or 100ml*9 or 250ml*9	50ml*20 or 100ml*16 or 250ml*12 or 500ml*9	100ml*20 or 250ml*16 or 500ml*12 or 1000ml*5 or 2000ml*4
	Standard capacity	100ml*9	50ml*4 100ml*4 250ml*3 500ml*3	50ml*5 100ml*5 250ml*4 500ml*3
Controller	PID Microcomputer			
Control Mode	Fixed value mode, static mode			
Display	Large high definition LCD			
Timer (min)	1 ~ 9999 (or continuous operation)			
Refrigerant	/	/	R134a (CFC free)	
Defrosting Mode	/	/	Automatic	
Safety Device	Self-diagnosis, visible & audible over temperature, abnormal status alarm, leakage protector			
Electricity	Voltage / Frequency	AC 220 / 110V, 50 / 60Hz		
	Consumption (W)	220	320	580
N.W. / G.W. (kg)	31 / 41	72 / 88	81 / 113	81 / 113
Shipping Dimension (W*D*H) (mm)	580*530*540	740*700*660	880*860*760	820*940*830
Optional	Various flask clamps, universal spring clamp.			

Shaking Incubator

ICB-S0420 ICB-S1020



Self-stop protection when the door is opened, and safety alarm.
Auto restart in case of power failure.
With over temperature control of visible& audible alarm system.



ICB-S1020

Key Features

- Large high definition LCD display,with intelligent microcomputer control, parameter real-time display
- Gentle and reliable shaking with direct brushless DC motor.
- Built-in temperature calibration function.
- Seven interchangeable platforms can be chosen for variety demands.

Optional

Fixture



Specifications

Model	ICB-S0420	ICB-S1020
Capacity (L)	45	160
Circulation	Forced convection	
Shake Mode	Convolution	
Orbit Diameter (mm)	Φ20	
Cyclotron Frequency	Range (rpm / min)	50~300
	Resolution (rpm)	10
Temperature	Range (°C)	RT+5 ~ 60
	Fluctuation (°C)	≤±0.5 (37°C)
	Resolution (°C)	0.1
	Uniformity (°C)	≤±0.5 (37°C)
Dimension (W*D*H)	External (mm)	421*320*338
	Platform (mm)	230*230
Controller	Microcomputer	
Display	Large high definition LCD	
Timer	1min~99h59min/∞	
Safety Device	Running safely: heating and shaking will be automatically stopped once the lid is open.	
Electricity	Voltage / Frequency	AC 220 / 110V, 50 / 60Hz
	Consumption (W)	350
N.W. / G.W. (kg)	18.5 / 25	41 / 58
Shipping Dimension (W*D*H) (mm)	565*470*460	750*620*695
Optional	Fixture	



Application

The constant temperature incubation shaker is a small bench-top shaking incubator that combines the functions of gas bath constant temperature and horizontal oscillation.

It is widely used in the fields of biotechnology, microbiology, medical analysis, etc.

A variety of optional trays meet the placement and fixation of various flasks, beakers, petri dishes, test tubes and other containers. Its ingenious combination of precise temperature control and low frequency and high amplitude oscillation functions; And it has the characteristics of small size, convenient operation, simple maintenance and so on.

Shaking Incubator

ICB-S100B ICB-S200B ICB-S100D
 ICB-S200D ICB-SL100F ICB-SL200F



Key Features



Intelligent control

Large high definition LCD display, with intelligent PID control, parameter real-time display.

Reservation timing switch function.

It has a multi-stage speed, temperature, and time control system, which allows a variety of different speed, temperature, and time experiment mode to be set once.



Internal circulation system

Silent fan design, forced air convection and unique air duct design ensure good temperature uniformity.

High efficiency and energy saving compressor, stable temperature control and low power consumption.



Dedicated sheet metal processing

With ABS cabinet, mirror stainless steel lining and chamber components, inclined humanized control panel.



Humanized design

Environmentally friendly refrigerant, CFC free.

The unique unidimensional drive system makes the machine run smoothly, stably, durable and reliable.

Built-in observation window to make the objects in the chamber clear at a glance.

The anti-scalding design of the door handle makes it easy to open and close the door.

Safety



With over temperature control of visible & audible alarm system.



The unique dynamic balance design ensures smooth operation, starts at ultra-low speed, and automatically locks when the speed is out of control.



Fault self-diagnosis function, auto-stop operation when door is opened and safety alarm.



Application

The oscillator (commonly known as a shaker) is one of the main equipment for microbial culture. Select special motor, temperature control, speed measurement main components are imported, widely used in biology, medicine, pharmaceutical food, environmental protection and agricultural scientific research.

Optional

Fixture、 7 inches touch screen (USB data storage)、
UV sterilization device、 Illumination

Specifications

Model	ICB-S100B		ICB-S200B		ICB-S100D		ICB-S200D		ICB-SL100F		ICB-SL200F		
Capacity (L)	70				70								
Circulation	Forced convection				Forced convection								
Drive Mode	Unidimensional drive				Unidimensional drive				Track drive				
Shake Mode	Convolution				Convolution								
Orbit Diameter (mm)	Φ26				Φ0-50								
Cyclotron Frequency	Range (rpm / min)	0 (to do static culture), 20-450				0 (to do static culture), 20-600				0 (to do static culture), 20-260			
	Resolution (rpm)	±1				±1							
Temperature	Range (°C)	RT +5 ~ 65		4 ~ 65 (RT: 25)		RT +5 ~ 65		4 ~ 65 (RT: 25)		RT +5 ~ 65		4 ~ 65 (RT: 25)	
	Fluctuation (°C)	≤0.1 (37°C)				≤0.1 (37°C)							
	Resolution (°C)	± 0.1				± 0.1							
	Uniformity (°C)	± 0.6 (37°C)				± 0.6 (37°C)							
Dimension (W*D*H)	External (mm)	750*710*520				750*710*520							
	Platform (mm)	450*410				410*360							
Flask Clamp	Max. capacity	100ml*23 or 250ml*16 or 500ml*9 or 1000ml*6 or 2000ml*4				100ml*23 or 250ml*16 or 500ml*9 or 1000ml*6 or 2000ml*4		100ml*23 or 250ml*16 or 500ml*9 or 1000ml*6 or 2000ml*4					
	Standard capacity	500ml*3 250ml*3 100ml*4 50ml*4		500ml*3 250ml*4 100ml*5 50ml*5		500ml*3 250ml*3 100ml*4 50ml*4		500ml*3 250ml*4 100ml*5 50ml*5		500ml*3 250ml*3 100ml*4 50ml*4		500ml*3 250ml*4 100ml*5 50ml*5	
Sticky Mat (Optional)	Max. capacity	100ml*30 or 250ml*20 or 500ml*9 or 1000ml*8 or 2000ml*4				100ml*21 or 250ml*16 or 500ml*9 or 1000ml*5 or 2000ml*4							
Controller	PID microcomputer				PID microcomputer								
Control Mode	Fixed value mode, static mode, multi-segment program control mode				Fixed value mode, static mode, multi-segment program control mode								
Display	Large high definition LCD				Large high definition LCD								
Timer (h)	0 ~ 9999 (or continuous operation)				0 ~ 9999h (or continuous operation)								
Refrigerant	/		R134a (CFC free)		/		R134a (CFC free)		/		R134a (CFC free)		
Defrosting Mode	/		Automatic		/		Automatic		/		Automatic		
Safety Device	Self-diagnosis, visible & audible over temperature, abnormal status alarm				Self-diagnosis, visible & audible over temperature, abnormal status alarm								
Electricity	Voltage/Frequency(V/Hz)	AC 220 / 110V, 50 / 60Hz				AC 220 / 110V, 50 / 60Hz							
	Consumption (W)	550		650		550		650		550		650	
N.W. / G.W. (kg)	75 / 105		90 / 120		75 / 105		9 / 120		75 / 105		90 / 120		
Shipping Dimension (W*D*H) (mm)	870*870*705		870*870*705		870*870*705		870*870*705		870*870*705		870*870*705		
Optional	Fixture、 7 inches touch screen (USB data storage)、 UV sterilization device、 Illumination				Fixture、 7 inches touch screen (USB data storage)、 UV sterilization device、 Illumination								

Single-layer Shaking Incubator

ICB-S170-B ICB-S285R



Key Features



Intelligent control

High definition LCD display, temperature, time and speed are displayed on the same interface.



Dedicated sheet metal processing

The inner chamber is made of polished stainless steel, with strong corrosion resistance.



Internal circulation system

Imported compressor with cooling system, effectively extend the life of the compressor.

Unique slope design panel, better visual effect.

Brushless DC motor, more stable and reliable.



Humanized design

The anti-scalding design of the door handle makes it easy to open and close the door.

With large view window and built-in lighting for easy observation.

The most advanced large torque motor to ensure continuous work without maintenance.

SAFETY

With over temperature control of visible& audible alarm system.

With operation data memory function to eliminate faulty operation.

Auto-stop operation when door is opened. Strong air spring rod with easy opening and closing.

Non-volatile memory saves settings during a power outage and automatically restarts the unit as originally programmed after power is restored.

Equipped with leakage protection device to ensure the safety of operators and other equipment in the laboratory

Application

The oscillator (commonly known as a shaker) is one of the main equipment for microbial culture. Select special motor, temperature control, speed measurement main components are imported, widely used in biology, medicine, pharmaceutical food, environmental protection and agricultural scientific research.

Optional

Universal Tray

Stainless steel flask clamp (50ml,100ml,250ml,500ml,1000ml,2000ml,3000ml,5000ml available)



Specifications

Model	ICB-S170-B		ICB-S285R
Capacity (L)	170		280
Circulation	Forced convection		
Shake Mode	Convolution		
Orbit Diameter (mm)	Φ26		
Cyclotron Frequency	Range (rpm/min)	40-300	
	Resolution (rpm)	±1	
Temperature	Range (°C)	4-60	
	Resolution (°C)	±0.1	
	Uniformity (°C)	±1	
Dimension (W*D*H)	External (mm)	660*440*650	840*520*640
	Internal (mm)	700*560*1260	950*700*1260
Flask Clamp	Max. Capacity	100ml*56 or 250ml*36 or 500ml*24 or 1000ml*12	250ml*70 or 500ml*48 or 1000ml*24
	Standard Capacity	250ml*36	250ml*70 500ml*48
Controller	PID Microcomputer		
Control Mode	Fixed value mode , static mode		
Display	Large high definition LCD		
Timer	1-9999min (Or continuous operation)		
Refrigerant	R134a (CFC free)		
Defrosting Mode	Automatic		
Safety Device	Self-diagnosis ; visible& audible over temperature ,abnormal status alarm , leakage protector		
Electricity	Voltage / Frequency	AC220V ~240V±10% , 50 ~ 60HZ	
	Consumption (W)	550	750
N.W. / G.W. (kg)	175/243		238/284
Shipping Dimension (W*D*H) (mm)	930*860*1510		1130*1000*1450
Optional	Universal Tray; Stainless steel flask clamp; (50ml,100ml,250ml,500ml,1000ml,2000ml,3000ml,5000ml available)		

Shaking Incubator

- ICB-S1102C
- ICB-S2102C
- ICB-S1102CD
- ICB-S2102CD
- ICB-S1102
- ICB-S2102
- ICB-S1102D
- ICB-S2102D
- ICB-S1112B
- ICB-S2112B
- ICB-SL1112F
- ICB-SL2112F



Key Features




Internal circulation system

Silent fan design, forced air convection and unique air duct design ensure good temperature uniformity.

High efficiency and energy saving compressor, stable temperature control and low power consumption.

High efficiency and energy saving compressor, stable temperature control and low power consumption, with environmentally friendly refrigerant, CFC free.

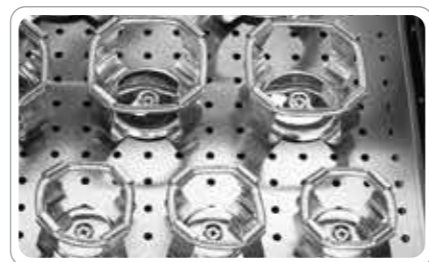

Dedicated sheet metal processing


With ABS cabinet, mirror stainless steel lining and chamber components.

Intelligent control

Large high definition LCD display, with intelligent PID control, parameter real-time display.

Reservation timing switch function.

It has a multi-stage speed, temperature, and time control system, which allows a variety of different speed, temperature, and time experiment modes to be set once.



Humanized design

Built-in observation window to make the objects in the chamber clear at a glance.

The anti-scalding design of the door handle makes it easy to open and close the door.

Safety




With over temperature control of visible & audible alarm system.



The unique dynamic balance design ensures smooth operation, starts at ultra-low speed, and automatically locks when the speed is out of control.



Fault self-diagnosis function, auto-stop operation when door is opened and safety alarm.

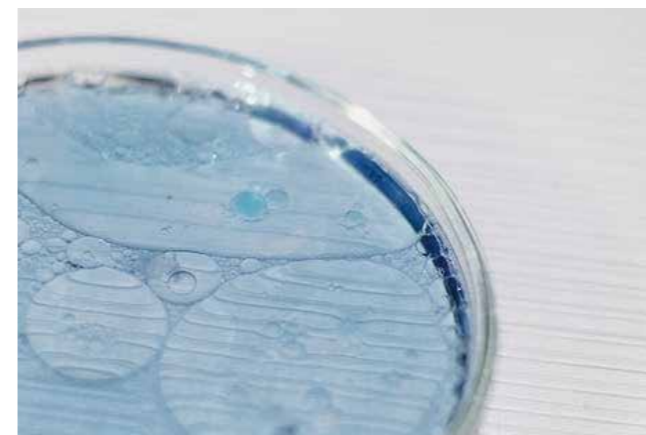

Application

The oscillator (commonly known as a shaker) is one of the main equipment for microbial culture. Select special motor, temperature control, speed measurement main components are imported, widely used in biology, medicine, pharmaceutical food, environmental protection and agricultural scientific research.

Optional

Fixture, 7 inches touch screen (USB data storage), UV sterilization device, Illumination

Specifications



ICB-S1102C ICB-S2102C
ICB-S1102CD ICB-S2102CD



ICB-S1102 ICB-S2102 ICB-S1102D ICB-S2102D
ICB-S1112B ICB-S2112B ICB-SL1112F ICB-SL2112F

Model	ICB-S1102C		ICB-S2102C		ICB-S1102CD		ICB-S2102CD		ICB-S1102		ICB-S2102		
Capacity (L)	160		160		218		218		305		305		
Circulation	Forced convection				Forced convection								
Drive Mode	Multidimensional drive				Multidimensional drive								
Shake Mode	Convolution				Convolution								
Orbit Diameter (mm)	Φ 26				Φ 26								
Cyclotron Frequency	Range (rpm / min)	0 (to do static culture); 20 ~ 350		0 (to do static culture); 20 ~ 350		0 (to do static culture); 20 ~ 350		0 (to do static culture); 20 ~ 350					
	Resolution (rpm)	±1		±1		±1		±1					
Temperature	Range (°C)	RT+5 ~ 65		4 ~ 65 (RT.25)		RT+5 ~ 65		4~65 (RT.25)		RT+5 ~ 65		4 ~ 65 (RT.25)	
	Fluctuation (°C)	≤0.1 (37°C)		≤0.1 (37°C)		≤0.1 (37°C)		≤0.1 (37°C)					
	Resolution (°C)	± 0.1		± 0.1		± 0.1		± 0.1					
	Uniformity (°C)	±0.5 (37°C)		±0.5 (37°C)		±0.5 (37°C)		±0.5 (37°C)					
Dimension (W*D*H)	External (mm)	700*580*1280		700*580*1280		700*710*1320		700*710*1320		950*700*1280		950*700*1280	
	Platform (mm)	500*360		500*360		485*485		485*485		710*455		710*455	
Flask Clamp	Max. capacity	100ml*60 or 250ml*38 or 500ml*22 or 1000ml*16		100ml*60 or 250ml*38 or 500ml*22 or 1000ml*16		100ml*84 or 250ml*50 or 500ml*32 or 1000ml*18		100ml*84 or 250ml*50 or 500ml*32 or 1000ml*18		100ml*100 or 250ml*56 or 500ml*44 or 1000ml*24		100ml*100 or 250ml*56 or 500ml*44 or 1000ml*24	
	Standard capacity	250ml*24		250ml*24		250ml*48		250ml*48		250ml*28 500ml*22		250ml*28 500ml*22	
Sticky Mat (Optional)	Max. capacity	100ml*60 or 250ml*36 or 500ml*24 or 1000ml*16		100ml*60 or 250ml*36 or 500ml*24 or 1000ml*16		100ml*84 or 250ml*50 or 500ml*32 or 1000ml*18		100ml*84 or 250ml*50 or 500ml*32 or 1000ml*18		100ml*120 or 250ml*70 or 500ml*44 or 1000ml*24		100ml*120 or 250ml*70 or 500ml*44 or 1000ml*24	
Controller	PID microcomputer				PID microcomputer								
Control Mode	Fixed value mode, static mode, multi-segment program control mode				Fixed value mode, static mode, multi-segment program control mode								
Display	Large high definition LCD				Large high definition LCD								
Timer (h)	0 ~ 9999 (or continuous operation)				0 ~ 9999 (or continuous operation)								
Refrigerant	/		R134a (CFC free)		/		R134a (CFC free)		/		R134a (CFC free)		
Defrosting Mode	/		Automatic		/		Automatic		/		Automatic		
Safety Device	Self-diagnosis, visible & audible over temperature, abnormal status alarm.				Self-diagnosis, visible & audible over temperature, abnormal status alarm.								
Electricity	Voltage / Frequency	AC 220 / 110V, 50 / 60Hz		AC 220 / 110V, 50 / 60Hz		AC 220 / 110V, 50 / 60Hz		AC 220 / 110V, 50 / 60Hz					
	Consumption (W)	600		850		600		850		900		1150	
N.W. / G.W. (kg)	160 / 210		180 / 220		180 / 230		200 / 240		270 / 330		280 / 340		
Shipping Dimension (W*D*H) (mm)	825*720*1490		825*720*1490		850*830*1480		850*830*1480		1050*820*1490		1050*820*1490		
Optional	Fixture, 7 inches touch screen (USB data storage), UV sterilization device, Illumination				Fixture, 7 inches touch screen (USB data storage), UV sterilization device, Illumination								



ICB-S1102 ICB-S2102 ICB-S1102D ICB-S2102D
ICB-S1112B ICB-S2112B ICB-SL1112F ICB-SL2112F



ICB-S1102 ICB-S2102 ICB-S1102D ICB-S2102D
ICB-S1112B ICB-S2112B ICB-SL1112F ICB-SL2112F

Specifications

Model	ICB-S1102D		ICB-S2102D		ICB-S1112B		ICB-S2112B		ICB-SL1112F		ICB-SL2112F		
Capacity (L)	400		400		580		580		580		580		
Circulation	Forced convection				Forced convection								
Drive Mode	Multidimensional drive				Multidimensional drive				Track drive				
Shake Mode	Convolution				Convolution				Reciprocate				
Orbit Diameter (mm)	Φ 26				Φ 26				Φ 0 ~ 50				
Cyclotron Frequency	Range (rpm / min)	0 (to do static culture) ; 20 ~ 350		0 (to do static culture) ; 20 ~ 280		0 (to do static culture) ; 20 ~ 280		0 (to do static culture) ; 20 ~ 260		0 (to do static culture) ; 20 ~ 260		0 (to do static culture) ; 20 ~ 260	
	Resolution (rpm)	±1		±1		±1		±1		±1		±1	
Temperature	Range (°C)	RT+5 ~ 65		4 ~ 65 (RT.25)		RT+5 ~ 65		4 ~ 65 (RT.25)		RT+5 ~ 65		4 ~ 65 (RT.25)	
	Fluctuation (°C)	≤0.1 (37°C)		≤0.1 (37°C)		≤0.1 (37°C)		≤0.1 (37°C)		≤0.1 (37°C)		≤0.1 (37°C)	
	Resolution (°C)	± 0.1		± 0.1		± 0.1		± 0.1		± 0.1		± 0.1	
	Uniformity (°C)	±0.5 (37°C)		±0.5 (37°C)		±0.5 (37°C)		±0.5 (37°C)		±0.5 (37°C)		±0.5 (37°C)	
Dimension (W*D*H)	External (mm)	1020*700*1460		1200*800*1630		1200*800*1630		1200*800*1630		1200*800*1630		1200*800*1630	
	Platform (mm)	780*450		780*450		950*550		950*550		950*550		950*550	
Flask Clamp	Max. capacity	250ml*90 or 500ml*56 or 1000ml*30 or 2000ml*16		250ml*90 or 500ml*72 or 1000ml*42		250ml*90 or 500ml*72 or 1000ml*42		250ml*90 or 500ml*72 or 1000ml*42		250ml*90 or 500ml*72 or 1000ml*42		250ml*90 or 500ml*72 or 1000ml*42	
	Standard capacity	250ml*39 500ml*23		250ml*45 500ml*36		250ml*45 500ml*36		250ml*45 500ml*36		250ml*45 500ml*36		250ml*45 500ml*36	
Sticky Mat (Optional)	Max. capacity	250ml*78 or 500ml*46 or 1000ml*30 or 2000ml*16		250ml*112 or 500ml*76 or 1000ml*42		250ml*112 or 500ml*76 or 1000ml*42		250ml*112 or 500ml*76 or 1000ml*42		250ml*112 or 500ml*76 or 1000ml*42		250ml*112 or 500ml*76 or 1000ml*42	
Controller	PID microcomputer				PID microcomputer				PID microcomputer				
Control Mode	Fixed value mode, static mode, multi-segment program control mode				Fixed value mode, static mode, multi-segment program control mode				Fixed value mode, static mode, multi-segment program control mode				
Display	Large high definition LCD				Large high definition LCD				Large high definition LCD				
Timer (h)	0 ~ 9999 (or continuous operation)				0 ~ 9999 (or continuous operation)				0 ~ 9999 (or continuous operation)				
Refrigerant	/		R134a (CFC free)		/		R134a (CFC free)		/		R134a (CFC free)		
Defrosting Mode	/		Automatic		/		Automatic		/		Automatic		
Safety Device	Self-diagnosis, visible & audible over temperature, abnormal status alarm.				Self-diagnosis, visible & audible over temperature, abnormal status alarm.				Self-diagnosis, visible & audible over temperature, abnormal status alarm.				
Electricity	Voltage / Frequency	AC 220 / 110V, 50 / 60Hz		AC 220 / 110V, 50 / 60Hz		AC 220 / 110V, 50 / 60Hz		AC 220 / 110V, 50 / 60Hz		AC 220 / 110V, 50 / 60Hz		AC 220 / 110V, 50 / 60Hz	
	Consumption (W)	900		1150		1100		1400		1100		1400	
N.W. / G.W. (kg)	290 / 350		300 / 360		500 / 580		520 / 600		500 / 580		520 / 600		
Shipping Dimension (W*D*H) (mm)	1200*900*1600		1220*900*1660		1355*950*1795		1355*950*1795		1355*950*1795		1355*950*1795		
Optional	Fixture, 7 inches touch screen (USB data storage), UV sterilization device, Illumination				Fixture, 7 inches touch screen (USB data storage), UV sterilization device, Illumination				Fixture, 7 inches touch screen (USB data storage), UV sterilization device, Illumination				

Shaking Incubator

ICB-S111B ICB-S211B ICB-S111BD ICB-S211BD
ICB-S111C ICB-S211C ICB-SL111F ICB-SL211F

ERC CE FDA



Key Features

Intelligent control

Large high definition LCD display, with intelligent PID control, parameter real-time display.

Reservation timing switch function.

It has a multi-stage speed, temperature, and time control system, which allows a variety of different speed, temperature, and time experiment modes to be set once.



Internal circulation system

Silent fan design, forced air convection and unique air duct design ensure good temperature uniformity.

High efficiency and energy saving compressor, stable temperature control and low power consumption.

High efficiency and energy saving compressor, stable temperature control and low power consumption, with environmentally friendly refrigerant, CFC free.



Dedicated sheet metal processing

With ABS cabinet, mirror stainless steel lining and chamber components, inclined humanized control panel.



Humanized design

Built-in observation window to make the objects in the chamber clear at a glance.

The anti-scalding design of the door handle makes it easy to open and close the door.

Safety



With over temperature control of visible & audible alarm system.



The unique dynamic balance design ensures smooth operation, starts at ultra-low speed, and automatically locks when the speed is out of control.



Fault self-diagnosis function, auto-stop operation when door is opened (optional) and safety alarm.



Application

The oscillator (commonly known as a shaker) is one of the main equipment for microbial culture. Select special motor, temperature control, speed measurement main components are imported, widely used in biology, medicine, pharmaceutical food, environmental protection and agricultural scientific research.

Optional

Fixture, 7 inches touch screen (USB data storage),
UV sterilization device, Illumination



ICB-S111B ICB-S211B ICB-S111BD ICB-S211BD
ICB-S111C ICB-S211C ICB-SL111F ICB-SL211F

Specifications

Model	ICB-S111B	ICB-S211B	ICB-S111BD	ICB-S211BD	ICB-S111C	ICB-S211C	ICB-SL111F	ICB-SL211F	
Capacity(L)	203		220		296		203		
Circulation	Forced convection				Forced convection				
Drive Mode	Multidimensional drive				Multidimensional drive		Track drive		
Shake Mode	Convolution				Convolution		Reciprocate		
Orbit Diameter (mm)	Φ 26				Φ 26		Φ 0 ~ 50		
Cyclotron Frequency	Range (rpm / min)	0 (to do static culture); 20 ~ 350			0 (to do static culture) ; 20 ~ 350		0 (to do static culture); 20 ~ 260		
	Resolution (rpm)	±1			±1				
Temperature	Range (℃)	RT +5 ~ 65	4 ~ 65 (RT.25)	RT +5 ~ 65	4 ~ 65 (RT.25)	RT +5 ~ 65	4 ~ 65 (RT.25)	4 ~ 65 (RT.25)	
	Fluctuation (℃)	≤0.1 (37℃)				≤0.1 (37℃)			
	Resolution (℃)	± 0.1				± 0.1			
	Uniformity (℃)	±0.5 (37℃)				±0.5 (37℃)			
Dimension (W*D*H)	External (mm)	1200*760*880			1200*760*1050		1200*760*880		
	Platform (mm)	920*500		920*540		920*500			
Flask Clamp	Max. capacity	100ml*66 or 250ml*45 or 500ml*28 or 1000ml*15 or 2000ml*11		250ml*67 or 500ml*42 or 1000ml*24 or 2000ml*15		250ml*45 or 500ml*28 or 1000ml*15 or 2000ml*11 or 3000ml*8 or 5000ml*6		100ml*66 or 250ml*45 or 500ml*28 or 1000ml*15 or 2000ml*11	
	Standard capacity	500ml*28		500ml*38		2000ml*8		500ml*28	
Sticky Mat (Optional)	Max. capacity	100ml*77 or 250ml*48 or 500ml*32 or 1000ml*18 or 2000ml*14		250ml*67 or 500ml*38 or 1000ml*24 or 2000ml*15		250ml*48 or 500ml*32 or 1000ml*18 or 2000ml*14 or 3000ml*8 or 5000ml*6		100ml*77 or 250ml*48 or 500ml*32 or 1000ml*18 or 2000ml*14	
Controller	PID microcomputer				PID microcomputer				
Control Mode	Fixed value mode, static mode, multi-segment program control mode				Fixed value mode, static mode, multi-segment program control mode.				
Display	Large high definition LCD				Large high definition LCD				
Timer (h)	0 ~ 9999 (or continuous operation)				0 ~ 9999 (or continuous operation)				
Refrigerant	/	R134a (CFC free)	/	R134a (CFC free)	/	R134a (CFC free)	/	R134a (CFC free)	
Defrosting Mode	/	Automatic	/	Automatic	/	Automatic	/	Automatic	
Safety Device	Self-diagnosis, visible & audible over temperature, abnormal status alarm.				Self-diagnosis, visible & audible over temperature, abnormal status alarm				
Electricity	Voltage/Frequency	AC 220 / 110V, 50 / 60Hz				AC 220 / 110V, 50 / 60Hz			
	Consumption (W)	650	900	650	900	650	950	650	900
N.W. / G.W. (kg)	170 / 250	190 / 260	170 / 250	190 / 260	180 / 260	200 / 270	170 / 250	190 / 260	
Shipping Dimension (W*D*H) (mm)	1332 *850 *1050				1350 *860 *1250		1332*850*1050		
Optional	Fixture, 7 inches touch screen (USB data storage), UV sterilization device, Illumination				Fixture, 7 inches touch screen (USB data storage), UV sterilization device, Illumination				

Horizontal Shaking Incubators

ICB-SH265 ICB-SH265R



Key Features



Intelligent control

High definition LCD display, temperature, time and speed are displayed on the same interface.



Dedicated sheet metal processing

The inner chamber is made of polished stainless steel, with strong corrosion resistance.



Internal circulation system

Imported compressor with cooling system, effectively extend the life of the compressor.

Unique slope design panel, better visual effect.

Brushless DC motor, more stable and reliable.



Humanized design

The anti-scalding design of the door handle makes it easy to open and close the door.

With large view window and built-in lighting for easy observation.

The most advanced large torque motor to ensure continuous work without maintenance.

SAFETY

With over temperature control of visible & audible alarm system.

With operation data memory function to eliminate faulty operation.

Auto-stop operation when door is opened. Strong air spring rod with easy opening and closing.

Non-volatile memory saves settings during a power outage and automatically restarts the unit as originally programmed after power is restored.

Equipped with leakage protection device to ensure the safety of operators and other equipment in the laboratory

With UV Sterilizer

Application

The oscillator (commonly known as a shaker) is one of the main equipment for microbial culture. Select special motor, temperature control, speed measurement main components are imported, widely used in biology, medicine, pharmaceutical food, environmental protection and agricultural scientific research.

Optional

Universal Tray

Stainless steel flask clamp
(50ml,100ml,250ml,500ml,1000ml,2000ml,3000ml,5000ml available)



Specifications

Model	ICB-SH265	ICB-SH265R
Capacity (L)	155	265
Circulation	Forced convection	
Shake Mode	Convolution	
Orbit Diameter (mm)	Φ26	
Cyclotron Frequency	Range (rpm/min)	20-300
	Resolution (rpm)	±1
Temperature	Range (°C)	4-60 (Cooling)
	Resolution (°C)	±0.1
	Uniformity (°C)	±1
Dimension (W*D*H)	External (mm)	1200*740*800
	Internal (mm)	970*565*280
Flask Clamp	Max. Capacity	250ml*39 or 500ml*28 or 1000ml*18
	Standard Capacity	500ml*28
Controller	PID Microcomputer	
Control Mode	Fixed value mode, static mode	
Display	Large high definition LCD	
Timer	1-9999min (Or continuous operation)	
Refrigerant	R134a (CFC free)	
Defrosting Mode	Automatic	
Safety Device	Self-diagnosis; visible & audible over temperature, abnormal status alarm	
Electricity	Voltage / Frequency	AC220V±10%, 50-60Hz
	Consumption (W)	866
N.W. / G.W. (kg)	210/250	220/254
Shipping Dimension (W*D*H) (mm)	1330*830*1070	1330*830*1260
Optional	Universal Tray; Stainless steel flask clamp (50ml,100ml,250ml,500ml,1000ml,2000ml,3000ml,5000ml available)	

Shaking Incubator

ICB-2S106 ICB-2S206 ICB-2S103
ICB-2S203 ICB-2S102 ICB-2S202



ICB-2S103 ICB-2S203 ICB-2S102 ICB-2S202

Key Features




Internal circulation system

Silent fan design, forced air convection and unique air duct design ensure good temperature uniformity.

High efficiency and energy saving compressor, stable temperature control and low power consumption.

High efficiency and energy saving compressor, stable temperature control and low power consumption, with environmentally friendly refrigerant, CFC free.

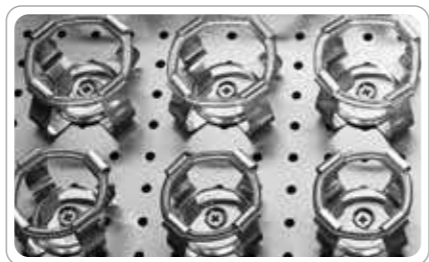


Dedicated sheet metal processing

With ABS cabinet, mirror stainless steel lining and chamber components.

Intelligent control

Large high definition LCD display, with intelligent PID control, parameter real-time display.

It has a multi-stage speed, temperature, and time control system, which allows a variety of different speed, temperature, and time experiment modes to be set once.



Humanized design

Built-in observation window to make the objects in the chamber clear at a glance.

The anti-scalding design of the door handle makes it easy to open and close the door.

Built-in diversion waterproof system.

Built-in humidification pan.

Safety



With over temperature control of visible & audible alarm system.



Standard UV sterilization device (including air duct disinfection) and lighting.



Fault self-diagnosis function, auto-stop operation when door is opened and safety alarm.



The unique dynamic balance design ensures smooth operation, starts at ultra-low speed, and automatically locks when the speed is out of control.



Application

The oscillator (commonly known as a shaker) is one of the main equipment for microbial culture. Select special motor, temperature control, speed measurement main components are imported, widely used in biology, medicine, pharmaceutical food, environmental protection and agricultural scientific research.

Optional

Fixture, 7 inches touch screen (USB data storage)

Specifications



ICB-2S106
ICB-2S206



ICB-2S103 ICB-2S203
ICB-2S102 ICB-2S202

Model	ICB-2S106		ICB-2S206	ICB-2S103	ICB-2S203	ICB-2S102	ICB-2S202
Capacity (L)	184		184	180	180	306	306
Circulation	Forced convection		Forced convection				
Drive Mode	Multidimensional drive		Multidimensional drive				
Shake Mode	Convolution		Convolution				
Orbit Diameter (mm)	Φ 26		Φ 26				
Cyclotron	Range (rpm / min)		0 (to do static culture); 20 ~ 350 (top floor 20 ~ 300)				
Frequency	Resolution (rpm)		±1				
Temperature	Range (°C)		4 ~ 65 (RT.25)	RT +5 ~ 65	4 ~ 65 (RT.25)	RT +5 ~ 65	4 ~ 65 (RT.25)
	Fluctuation (°C)		≤0.1 (37°C)				
	Resolution (°C)		± 0.1				
	Uniformity (°C)		± 0.6 (37°C)				
Dimension (W*D*H)	External (mm)		870*755*650 (per unit)	1120*790*620 (per unit)		1360*830*620 (per unit)	
	Platform (mm)		475*465	610*460		830*510	
Flask Clamp	Max. capacity		250ml*25 or 500ml*16 or 1L*9 or 2L*5 (3L*5 or 5L*4) (per unit)	250ml*25 or 500ml*16 or 1L*9 or 2L*5 (per unit)	250ml*32 or 500ml*21 or 1L*13 or 2L*7 (per unit)		250ml*60 or 500ml*40 or 1L*20 or 2L*11 (per unit)
	Standard capacity		500ml*16	500ml*16	500ml*21		500ml*33
Sticky Mat (Optional)	Max. capacity		250ml*25 or 500ml*16 or 1L*9 or 2L*5 (per unit) or 3L*4 or 5L*2	250ml*25 or 500ml*16 or 1L*9 or 2L*5 (per unit) or 3L*4 or 5L*2	250ml*32 or 500ml*20 or 1L*12 or 2L*8 (per unit)		250ml*55 or 500ml*33 or 1L*18 or 2L*15 (per unit)
Controller	PID microcomputer		PID microcomputer				
Control Mode	Fixed value mode, static mode, multi-segment program control mode		Fixed value mode, static mode, multi-segment program control mode				
Display	Large high definition LCD		Large high definition LCD				
Timer (h)	0 ~ 9999 (or continuous operation)		0~9999 (or continuous operation)				
Refrigerant	/		R134a (CFC free)	/	R134a (CFC free)	/	R134a (CFC free)
Defrosting Mode	/		Automatic	/	Automatic	/	Automatic
Safety Device	Self-diagnosis, visible & audible over temperature, abnormal status alarm		Self-diagnosis, visible & audible over temperature, abnormal status alarm				
Electricity	Voltage / Frequency		AC 220 / 110V, 50 / 60Hz				
	Consumption (W)		550	650	1000	1200	1600
N.W. / G.W. (kg)	140 / 160		150 / 170	190 / 220	190 / 230	200 / 230	210 / 240
Shipping Dimension (W*D*H) (mm)	930*1020*850 (per unit)		930*1020*850 (per unit)	1275*950*810 (per unit)		1520*990*830 (per unit)	
Optional	Fixture, 7 inches touch screen (USB data storage)		Fixture, 7 inches touch screen (USB data storage)				

Stackable Shaking Incubator

ICB-2S200



Key Features



Intelligent control

High definition LCD display, temperature, time and speed are displayed on the same interface.



Dedicated sheet metal processing

The inner chamber is made of polished stainless steel, with strong corrosion resistance.



Internal circulation system

Imported compressor with cooling system, effectively extend the life of the compressor.

Unique slope design panel, better visual effect.

Brushless DC motor, more stable and reliable.

Humanized design

The anti-scalding design of the door handle makes it easy to open and close the door.

With large view window and built-in lighting for easy observation.

The most advanced large torque motor to ensure continuous work without maintenance.

Stackable up to three units for maximum space savings.

Independent control of temperature and shaking speed for each layer or separately run different layer according to needs



SAFETY

With over temperature control of visible & audible alarm system.

With operation data memory function to eliminate faulty operation.

Non-volatile memory saves settings during a power outage and automatically restarts the unit as originally programmed after power is restored.

With UV Sterilizer

Application

The oscillator (commonly known as a shaker) is one of the main equipment for microbial culture. Select special motor, temperature control, speed measurement main components are imported, widely used in biology, medicine, pharmaceutical food, environmental protection and agricultural scientific research.

Optional

Universal Tray Stainless steel flask clamp
(50ml,100ml,250ml,500ml,1000ml,2000ml,3000ml,5000ml available)



Specifications

Model	ICB-2S200	
Capacity (L)	245	
Circulation	Forced convection	
Shake Mode	Convolution	
Orbit Diameter (mm)	Φ28	
Cyclotron Frequency	Range (rpm/min)	60~280
	Resolution (rpm)	±1
Temperature	Range (°C)	4~60 (Ambient temperature :25 °C)
	Resolution (°C)	±0.1 (Under constant temperature)
	Uniformity (°C)	±1
Dimension (W*D*H)	External (mm)	1320*850*630
	Internal (mm)	900*580*390 (single layer)
Flask Clamp	Max. Capacity	250ml*36 or 500ml*24 or 1000ml*15 or 2000ml*8
	Standard Capacity	500ml*24 (single layer)
Controller	PID Microcomputer	
Control Mode	Fixed value mode , static mode	
Display	Touch Screen	
Timer	0~999(h)	
Refrigerant	R134a (CFC free)	
Defrosting Mode	Automatic	
Safety Device	Self-diagnosis ; visible & audible over temperature , abnormal status alarm , leakage protector	
Electricity	Voltage / Frequency	AC220V±10%, 50~60HZ
	Consumption (W)	2700
N.W. / G.W. (kg)	220/277	
Shipping Dimension (W*D*H) (mm)	1520*1050*930	
Optional	Universal Tray ;Stainless steel flask clamp (50ml,100ml,250ml,500ml,1000ml,2000ml,3000ml,5000ml available)	

Shaking Incubator

ICB-CO2-2S202 ICB-CO2-2S203 ICB-CO2-2S206




Key Features



Cooling system

High efficiency and energy saving compressor, stable temperature control and low power consumption.
High efficiency and energy saving compressor, stable temperature control and low power consumption, with environmentally friendly refrigerant, CFC free.




Dedicated sheet metal processing

With ABS cabinet, mirror stainless steel lining and chamber components.

Intelligent control

Large high definition LCD display, with intelligent PID control, parameter real-time display.
Automatic locking and alarm for speed deviation, and alarm for temperature deviation.
Reservation timing switch function.
It has a multi-stage speed, temperature, and time control system.
Using original imported infrared sensor, automatic control of CO₂ concentration, sensitive response and high precision.
Close the door and restart the device after opening the door for 30 minutes, the temperature recovery time is ≤6min (37°C), and the CO₂ concentration recovery time is ≤6min (5%).



Humanized design

- With a USB data recording system.
- Built-in observation window to make the objects in the chamber clear at a glance.
- The anti-scalding design of the door handle makes it easy to open and close the door.
- Built-in diversion waterproof system.
- Built-in humidification pan(Except ICB-CO2-2S206).

Safety



With over temperature control of visible & audible alarm system.



Standard UV sterilization device (including air duct disinfection) and lighting.



Fault self-diagnosis function, auto-stop operation when door is opened and safety alarm.



The unique dynamic balance design ensures smooth operation, starts at ultra-low speed, and automatically locks when the speed is out of control.



Application

This product is used for the cultivation of cells, tissue culture and some special microorganisms; or it is necessary to control the experimental temperature and apply a cyclotron motion to the experimental solution.

Optional

Various flask clamps, universal spring tray.

Specifications

Model	ICB-CO2-2S202		ICB-CO2-2S203	ICB-CO2-2S206
Capacity (L)	310		184	164
Circulation	Forced convection		Forced convection	
Drive Mode	Multidimensional drive		Multidimensional drive	
Shake Mode	Convolution		Convolution	
Orbit Diameter (mm)	Φ 50 (Φ 26, Φ 35 can be customized)		Φ 50 (Φ 26, Φ 35 can be customized)	
Cyclotron	Range (rpm / min)	0 (to do static culture) ; 20 ~ 350 (top floor 20 ~ 300)	0 (to do static culture); 20 ~ 350 (top floor 20 ~ 300)	
Frequency	Resolution (rpm)	±1	±1	
CO ₂	Range	0 ~ 20.0%	0 ~ 20.0%	
	Fluctuation	± 0.1% (concentration: 5%)	± 0.1% (concentration: 5%)	
Temperature	Range (°C)	RT-20 ~ 65 (ambient-20)	RT-20 ~ 65 (ambient-20)	
	Fluctuation (°C)	≤0.1 (37°C)	≤0.1 (37°C)	
	Resolution (°C)	± 0.1	± 0.1	
	Uniformity (°C)	± 0.6 (37°C)	± 0.6 (37°C)	
Dimension (W*D*H)	External (mm)	1420*820*630 (per unit)	1120*790*620 (per unit)	890*760*650 (per unit)
	Platform (mm)	905*505	600*450	475*465
Flask Clamp	Max. capacity	250ml*53 or 500ml*35 or 1000ml*20 or 2000ml*11 (per unit)	250ml*32 or 500ml*20 or 1000ml*12 or 2000ml*7 (per unit)	250ml*25 or 500ml*16 or 1000ml*9 or 2000ml*5 (per unit)
	Standard capacity	500ml*33	500ml*20	500ml*16
Sticky Mat (Optional)	Max. capacity	250ml*46 or 500ml*33 or 1000ml*18 or 2000ml*11 (per unit)	250ml*30 or 500ml*18 or 1000ml*12 or 2000ml*6 (per unit)	250ml*25 or 500ml*16 or 1000ml*9 or 2000ml*5 (per unit)
Controller	PID microcomputer		PID microcomputer	
Control Mode	Fixed value mode, static mode, multi-segment program control mode		Fixed value mode, static mode, multi-segment program control mode	
Display	7 inches touch screen		7 inches touch screen	
Timer (h)	0 ~ 999.9 (or continuous operation)		0 ~ 999.9 (or continuous operation)	
Refrigerant	R134a (CFC free)		R134a (CFC free)	
Defrosting Mode	Automatic		Automatic	
Safety Device	Self-diagnosis, visible & audible over temperature, abnormal status alarm		Self-diagnosis, visible & audible over temperature, abnormal status alarm	
Electricity	Voltage / Frequency (V / Hz)	AC 220 / 110V, 50 / 60Hz	AC 220 / 110V, 50 / 60Hz	
	Consumption (W)	1800	1200	650
N.W. / G.W. (kg)	260 / 296		200 / 250	170 / 200
Shipping Dimension (W*D*H) (mm)	1580*990*830 (per unit)		1275*950*810 (per unit)	1020*930*850 (per unit)
Optional	Various flask clamps, universal spring tray.		Various flask clamps, universal spring tray.	

Egg Incubator

EGI-Z88 **EGI-Z176** **EGI-Z264** **EGI-Z352** **EGI-Z440**
EGI-Z528 **EGI-Z880** **EGI-Z1056** **EGI-Z1232** **EGI-Z1580**
EGI-Z2112 **EGI-Z3168** **EGI-Z4200** **EGI-Z5280** **EGI-Z6300**
EGI-Z8400 **EGI-Z12600** **EGI-Z16800** **EGI-Z19200** **EGI-Z22500**



Key Features

Color steel plate shell.

digital display, with intelligent microcomputer control, parameter real-time display.

High gear series digital display, automatic temperature control, humidity control, egg turning, alarm, temperature equalization, ventilation and oxygen supply, disinfection, water addition.

The reinforcement and improvement process is adopted, which can hatch at the same time, and can lay eggs and hatch in multiple batches.

With small size, intelligence and high measure precision.

Reliable, laborsaving, energy saving, easy to operate, low cost.


Specifications



Model	EGI-Z88	EGI-Z176	EGI-Z264	EGI-Z352	EGI-Z440	EGI-Z528	EGI-Z880	EGI-Z1056	EGI-Z1232	EGI-Z1580	
Capacity (Qty)	Chicken	88	176	264	352	440	528	880	1056	1232	1584
	Turkeys / Ducks / Peacocks	63	126	189	252	315	378	630	756	882	1134
	Geese	32	64	96	128	160	192	320	384	448	576
	Pigeons	112	224	336	448	560	672	1120	1344	1568	2016
	Quail or various bird eggs	221	442	663	884	1105	1326	2210	2652	3094	3978
Temperature	Range (°C)	0 ~ 50				0 ~ 50					
	Accuracy (°C)	± 0.1				± 0.1					
Humidity	Range	0 ~ 99% RH				0 ~ 99% RH					
	Accuracy	± 4% RH				± 4% RH					
	Method	Internal				Internal					
	Sensor	High precision anti-condensation				High precision anti-condensation					
Egg Turning Time (s)	Adjustable from 0 ~ 999 (preset value is 180)				Adjustable from 0 ~ 999 (preset value is 180)						
Egg Turning Cycle (h)	Adjustable from 0 ~ 99.9 (preset value is 1.5)				Adjustable from 0 ~ 99.9 (preset value is 1.5)						
Ventilation Time (s)	0 ~ 999 (adjustable, preset value is 30)				0 ~ 999 (adjustable, preset value is 30)						
Ventilation Cycle (h)	0 ~ 99.9 (adjustable, preset value is 2)				0 ~ 99.9 (adjustable, preset value is 2)						
Controller	Microprocessor				Microprocessor						
Display	Digital LED				Digital LED						
Material	Internal	Color steel				Color steel					
	External	Color steel				Color steel					
Safety Device	Leakage protector				Leakage protector						
Electricity	Voltage / Frequency	AC 110 / 220V, 50 / 60Hz				AC 110 / 220V, 50 / 60Hz					
	Consumption (W)	100	150	150	160	180	180	260	300	300	500
N.W. / G.W. (kg)	30 / 33	32 / 35	35 / 39	38 / 42	40 / 45	45 / 50	8 / 53	50 / 56	52 / 58	90 / 100	
Shipping Dimension (W*D*H) (mm)	730*600*800	730*600*800	730*600*900	730*600*1100	730*600*1150	730*600*1250	1000*780*1300	1000*730*1450	1000*780*1500	1300*880*1600	



Equipped with leakage protection device to ensure the safety of operators and other equipment in the laboratory.

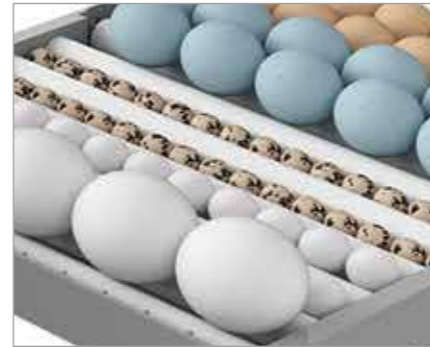

Application

Our microcomputer automatic incubator control system adopts the popular microcomputer technology with imported digital temperature sensor and moisture capacitance sensor, which make the instruments with small size, intelligence and high measure precision. Our incubator is reliable, laborsaving, energy saving, easy to operate, with low cost, and is the ideal middle and small size poultry incubator.

Specifications



Model	EGI-Z2112	EGI-Z3168	EGI-Z4200	EGI-Z5280	EGI-Z6300	EGI-Z8400	EGI-Z12600	EGI-Z16800	EGI-Z19200	EGI-Z22500	
Capacity (Qty)	Chicken	2112	3168	4224	5280	6336	8448	12672	16896	19712	22528
	Turkeys / Ducks / Peacocks	1512	2268	3024	3780	4536	6048	9073	12096	14112	16128
	Geese	768	1152	1536	1920	2304	3072	4608	6144	7168	8192
	Pigeons	2688	4032	5376	6720	8064	10752	16128	21504	25088	28672
Quail or various bird eggs	7956	7956	10608	13260	15912	21216	31824	42432	49504	56579	
Temperature	Range (°C)	0 ~ 50				0 ~ 50					
	Accuracy (°C)	± 0.1				± 0.1					
Humidity	Range	0 ~ 99% RH				0 ~ 99% RH					
	Accuracy	± 4% RH				± 4% RH					
	Method	Internal				Internal					
	Sensor	High precision anti-condensation				High precision anti-condensation					
Egg Turning Time (s)	Adjustable from 0 ~ 999 (preset value is 180)				Adjustable from 0 ~ 999 (preset value is 180)						
Egg Turning Cycle (h)	Adjustable from 0 ~ 99.9 (preset value is 1.5)				Adjustable from 0 ~ 99.9 (preset value is 1.5)						
Ventilation Time (s)	0 ~ 999 (adjustable, preset value is 30)				0 ~ 999 (adjustable, preset value is 30)						
Ventilation Cycle (h)	0 ~ 99.9 (adjustable, preset value is 2)				0 ~ 99.9 (adjustable, preset value is 2)						
Controller	Microprocessor				Microprocessor						
Display	Digital LED				Digital LED						
Material	Internal	Color steel				Color steel					
	External	Color steel				Color steel					
Safety Device	Leakage protector				Leakage protector						
Electricity	Voltage / Frequency	AC 110 / 220V, 50 / 60Hz				AC 110/ 220V, 50/ 60Hz	AC 220V / 380V, 50/ 60Hz				
	Consumption (W)	500	600	800	1000	1000	1500	2000	2500	3000	3200
N.W. / G.W. (kg)	110 / 120	160 / 170	180 / 200	230 / 255	300 / 330	500 / 530	700 / 750	950 / 1010	1000 / 1060	1100/1160	
Shipping Dimension (W*D*H) (mm)	1370*880*1700	1800*880*1700	1800*880*2100	2010*880*2100	2580*880*2100	2000*1800*2200	3000*1800*2100	4000*1800*2020	4000*1800*2300	4000*2020*2500	